

# OTHELLO DIM 30W IP54 Ceiling Light

4000K 2970lm



Product Code: PXOTH304D



## Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam Angle	CCT	Lifespan	CRI	Dimensions
30W	AC230V	30W	≥0.9	2970	120°	4000K	40000h	≥80	Ø400*52mm



## Driver Data Sheet

Driver Data	Dimmable
Input Rated Voltage	AC230V
Frequency	50Hz
Input Voltage	AC200-240V
Efficiency	≥88%
No Load Wattage	≤0.5W
Total Load Wattage	30W±5W
Power Factor	≥0.9
Rated Input Current	≤0.17A
Full Load Output Voltage	60-75V
Rated Output Current	370mA
Output Current Range	370mA±5%
Power Tolerance	±5%
Current Output Tolerance	±5%
Dimmer	Triac Dimmer
Dimming Range	8-100%
Short Circuit Protection	PASS
Over Voltage Protection	PASS
Over Temperature Protection	PASS
Withstand Voltage	AC3750V

## Fixture Compatibility

Rated Wattage	30W
Electrical Classification	II
Ingress Protection	IP54
Operating Temperature	-20°C~45°C
Operating Humidity	0~90%
Storage Temperature	-20°C~65°C

## Beam Angle

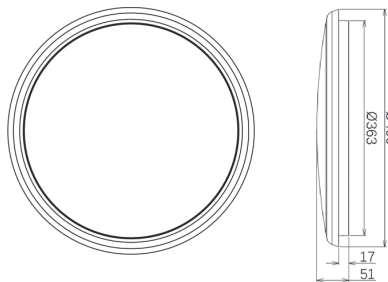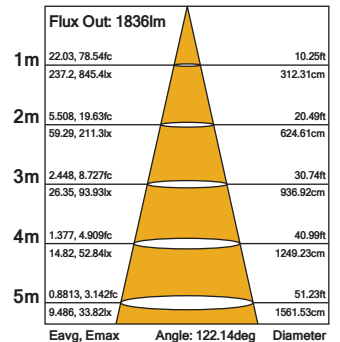

Prelux's Othello surface mounted ceiling light uses high lumen SMD LED's and a fire-rated Polycarbonate opal diffuser with an even light output. With it's IP54 waterproof structural design and 120° wide beam angle the Othello is an ideal solution for damp locations.

- Environment friendly, without Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Dimmable 8-100%
- 120° wide beam angle
- CCT: 4000K
- No UV/IR light