
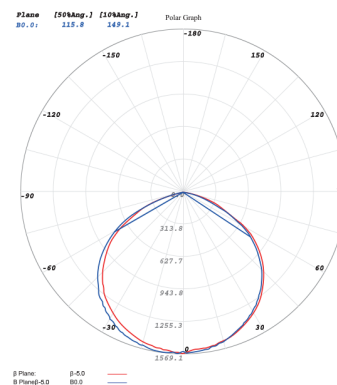


Prowler 50W 4000K Datasheet

IP65 4650Lm LED Floodlight

PXPR50WSB

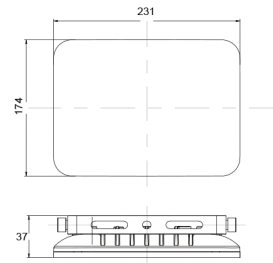

Dimensions	231*174*37mm
Input Voltage	230V AC 50Hz
Input Power	50W
Power Factor	≥0.9
Beam Angle	110°
Housing Material	Aluminium
Luminous Flux	4650lm
Color Rendering Index	≥70
Life Time	20,000h
CCT	4000K
LEDs	SMD 2835
Protection Level	IP65
Working Temperature	-20°C~+40°C
Net Weight	590g
Warranty	3 Years

Features & Applications

Prelux Prowler LED Floodlights provide up to 70% energy savings compared to non-LED Floods.

The range is maintenance free and IP65 rated for all-weather outdoor applications making it ideal for general exterior/security lighting, garden lighting and commercial/industrial lighting applications.

The adjustable bracket enables the beam to be oriented and fixed at the required angle.