

PISA 10W LED Dimmable Downlights

4000K 860lm



Product Code: PXPA4



Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam Angle	CCT	Lifespan	CRI	Dimensions
10W	AC230V	10W	≥0.9	860	36°	4000K	40000h	≥80	Ø82*58mm cutout Ø70-75mm




Driver Data Sheet

Driver Data	Dimmable
Input Rated Voltage	AC230V
Frequency	50Hz
Input Voltage	AC200-240V
Efficiency	≥75%
Total Load Wattage	10W±1W
Power Factor	≥0.9
Rated Input Current	≤0.06A
Full Load Output Voltage	DC33-38V
Rated Output Current	220mA
Output Current Range	220mA±5%
Power Tolerance	±5%
Current Output Tolerance	±5%
Dimming Range	8%-100%
Dimmer	Triac Dimmers
Short Circuit Protection	PASS
Over Voltage Protection	PASS
Over Temperature Protection	PASS

Fixture Compatibility

Rated Wattage	10W
Electrical Classification	II
Ingress Protection	IP40
Operating Temperature	-20°C~45°C
Operating Humidity	0~90%
Storage Temperature	-20°C~65°C

Beam Angle

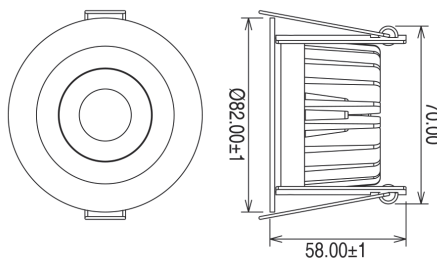

The Prelux Pisa 10W LED Downlight achieves a highly efficient 100 LPW by adopting super high lumen output COB LEDs coupled with a prismatic lens. The smart cooling system is specially designed with vertical cooling fins to allow air to flow smoothly around the fixture for excellent heat dissipation.

- Environmentally friendly, without Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Dimmable when using Triac Dimmer
- 36° beam angle
- Ø70-75mm cutout
- CCT: 4000K
- No UV/IR light