
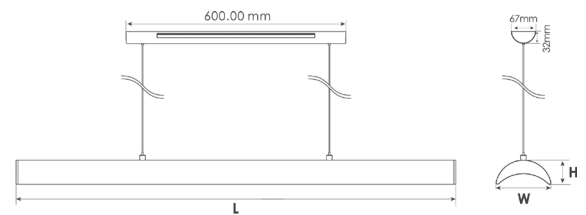


## New Moon Datasheet

15W Up / 35W Down Linear LED Pendant

PXNEWM

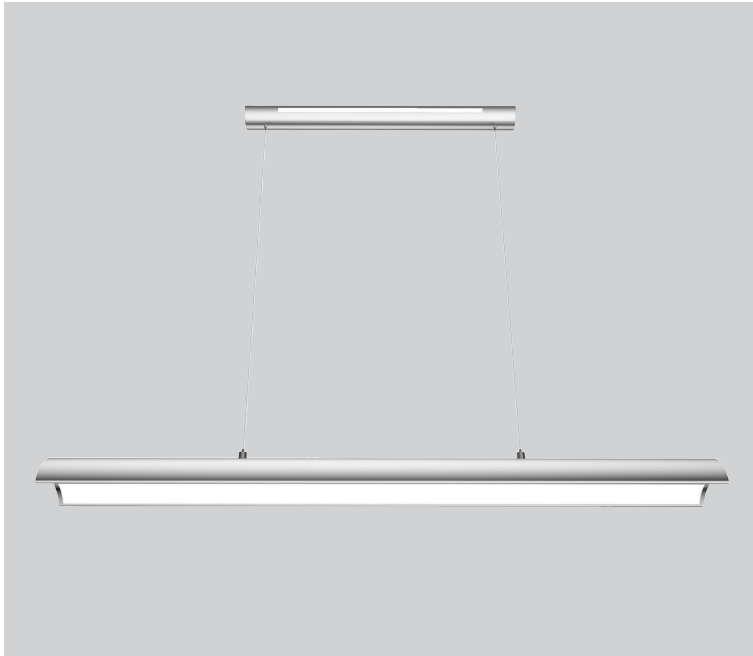

L\*W\*H=1200\*150\*66



<b>Dimensions</b>	1200*150*66mm
<b>Input Voltage</b>	AC100~240V/AC220~240V
<b>Input Power</b>	↑ 15W Up ↓ 35W Down
<b>Power Factor</b>	≥0.9
<b>Housing Color</b>	Silver/White
<b>Luminous Flux</b>	↑ 1275lm Up ↓ 2975lm Down
<b>Color Rendering Index</b>	>80
<b>Life Time</b>	50,000H
<b>Fixture Material</b>	6063AL
<b>CCT</b>	4000K
<b>LEDs</b>	↑ 120pcs Up ↓ 240pcs Down
<b>Protection Level</b>	IP 20
<b>Storage Temperature</b>	-40°C~+80°C
<b>Working Temperature</b>	-20°C~+45°C
<b>UGR</b>	<19
<b>Dimmable</b>	No
<b>Luminous Efficacy</b>	85lm/W
<b>Warranty</b>	5 Years

## Features & Applications

The Prelux New Moon Pendant is an elegant and versatile fitting suitable for a range of commercial, retail and architectural spaces.

The crescent shaped frame is crafted from high quality die cast aluminium for superb thermal dissipation, adding to the long 50,000 hour lifetime of the LEDs.

New Moon provides a soft even light with a low UGR of <19, while the 15W uplight and 35W downlight create an ambient atmospheric glow making New Moon ideal for public buildings, retail stores and commercial offices.