
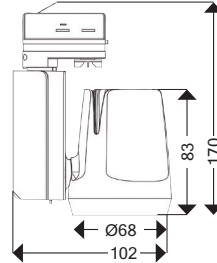



Nico Dim Black 15W Datasheet

4000K 1470Lm LED Track Spotlight

PX15BL4K

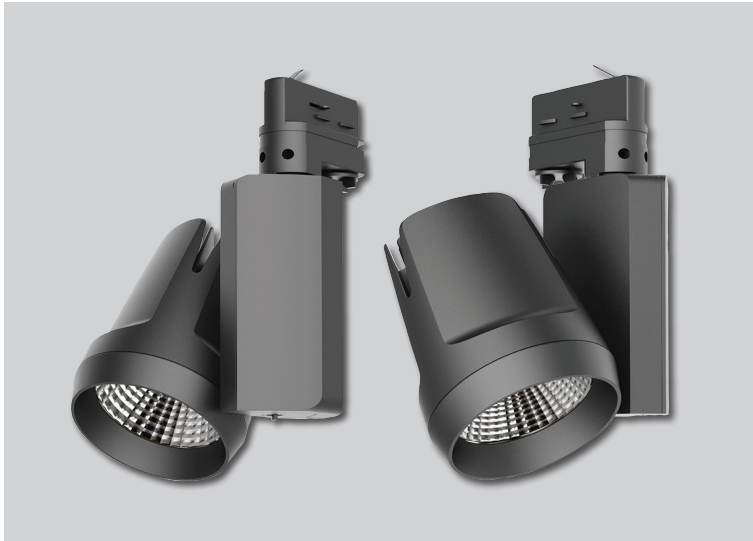

Beam Angle

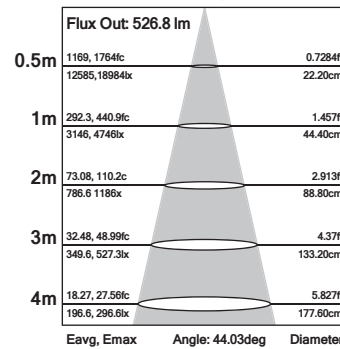

Input Rated Voltage	AC230V
Frequency	50Hz
Input Voltage	AC220-240V
Efficiency	≥85%
Total Load Wattage	15W±1W
Power Factor	≥0.9
Lumen Output ±5%	1470lm
Beam Angle	24°
CCT	4000K
Lifespan	50000h
CRI	≥80
Dimensions	L102*W68*H170mm
Rated Input Current	≤0.1A
Full Load Output Voltage	DC25-42V
Rated Output Current	350mA
Output Current Range	350mA±5%
Power Tolerance	±5%
Current Output Tolerance	±5%
Short Circuit Protection	PASS
Over Voltage Protection	PASS
Over Temperature Protection	PASS
THD	≤18%
Withstand Voltage	AC1500V

Features & Applications

Nico 15W adjustable adopts CREE LEDs with excellent color rendering index to increase the color fidelity of the target illuminated object and provide an even light output without glare or dark spots. Nico 15W adjusts 360° degrees horizontally and 180° vertically.

- Environment friendly, without Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Adjustable 360° degrees horizontally, 180° degrees vertically
- Long lifetime of 50,000 hours
- 24° beam angle
- CCT: 4000K
- No UV/IR light