


PRELUX

Dome 10W Datasheet

4000K 650lm LED Downlight

PXDOME104D

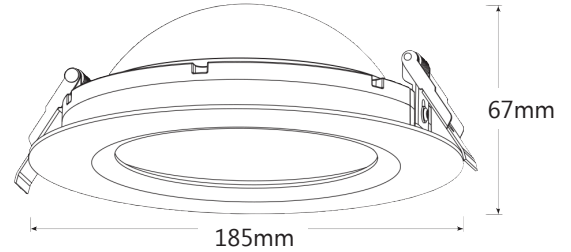

RoHS

IP20

LED



Dimensions	Ø185*67mm
Cutout	Ø160-170mm
Wattage	10W
Beam Angle	120°
CCT	4000K
Voltage	200-240VAC
LED	SMD
CRI	80
Lumens	650
Dimmable	Triac Dimmable 8-100%
Lifetime	>50000h
Certification	CE, RoHS
Fitting Warranty	3 Years

Features & Applications

The indirect light design of the Dome makes it a notable complement to the expansive Prelux downlight range. Available in 10W or 20W, 3000K or 4000K the Dome provides a soft and even indirect illumination by reflecting the light back from the hemispheric ceiling of the fitting.

- Indirect Light Design
- SMD LED Chip
- CRI 80
- 120° Beam Angle
- Triac Dimmable 8-100%
- Isolated Driver Solution
- No UV/IR Light