


PRELUX

Dome 20W Datasheet

3000K 1300lm LED Downlight

PXDOME203D

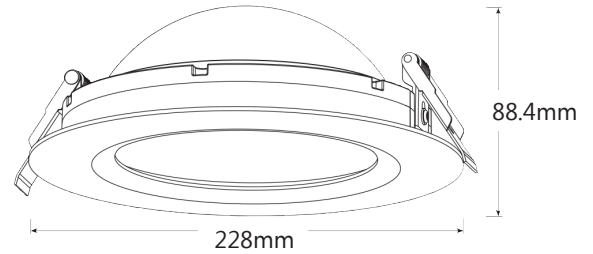

RoHS

IP20

LED



Dimensions	Ø228*88.4mm
Cutout	Ø200-210mm
Wattage	20W
Beam Angle	120°
CCT	3000K
Voltage	200-240VAC
LED	SMD
CRI	80
Lumens	1300
Dimmable	Triac Dimmable 8-100%
Lifetime	>50000h
Certification	CE, RoHS
Fitting Warranty	3 Years

Features & Applications

The indirect light design of the Dome makes it a notable complement to the expansive Prelux downlight range. Available in 10W or 20W, 3000K or 4000K the Dome provides a soft and even indirect illumination by reflecting the light back from the hemispheric ceiling of the fitting.

- Indirect Light Design
- SMD LED Chip
- CRI 80
- 120° Beam Angle
- Triac Dimmable 8-100%
- Isolated Driver Solution
- No UV/IR Light