


Task 42W 3000K Datasheet

4527-4765Lm LED Adjustable

PXTASK42W3K

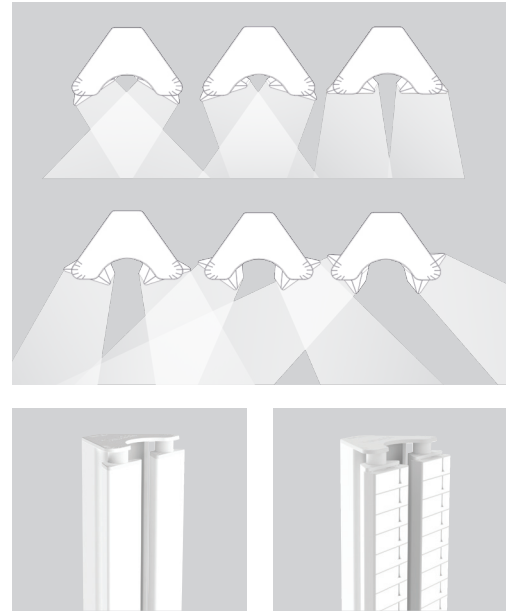

| | |
|-------------------------------|-----------------------------------|
| Dimensions | 560*H*145mm** |
| Input Power | 42W (±3%) |
| Lumens (±5%) | 4527-4765 |
| CCT | 3000K (±150) |
| Input Voltage | 198-264V 50/60Hz |
| Power Factor | 0.96-0.99 |
| Efficacy | 108-130Lm/W |
| Colour Rendering Index | >82 |
| Diffuser | 3 Types Available* |
| Recommended Height | from 2.5 to 6 meters |
| Operating Temp | -10°C~+35°C |
| Storage Temp | -5°C~+50°C |
| Lifetime | L90B10 70,000h (Ta +25°C) |
| Mounting Options | Surface, suspended, 3-phase track |
| IP Rating | IP20 |
| UGR Shades | Optional |
| Optional DALI | Yes |
| Certification | CE, RoHS |
| Warranty | 5 Years |

Features & Applications

Task adjustable linear fitting offers an ideal solution for retailers with the ability to adjust two parallel linear strips of light at different angles, focusing them independently on opposite sides of the supermarket aisle.

Task is available up to 15,600Lm with a choice of three diffusers and can be either surface/track mounted or suspended.

*DIA - Diamond light diffuser | FRO - Frosted light diffuser | CRS - Crosswise stripped light diffuser
 **H - Depends on mounting solution: 3-phase track H=138; surface, suspended H=81