


Task 82W 4000K Datasheet

9676-10660Lm LED Adjustable

PXTASK82W4K

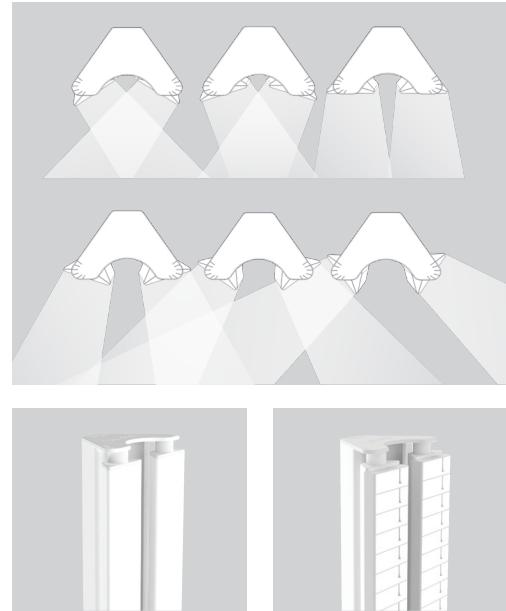

Dimensions	1060*H*145mm**
Input Power	82W (±3%)
Lumens (±5%)	9676-10660
CCT	4000K (±150)
Input Voltage	198-264V 50/60Hz
Power Factor	0.96-0.99
Efficacy	108-130Lm/W
Colour Rendering Index	>82
Diffuser	3 Types Available*
Recommended Height	from 2.5 to 6 meters
Operating Temp	-10°C~+35°C
Storage Temp	-5°C~+50°C
Lifetime	L90B10 70,000h (Ta +25°C)
Mounting Options	Surface, suspended, 3-phase track
IP Rating	IP20
UGR Shades	Optional
Optional DALI	Yes
Certification	CE, RoHS
Warranty	5 Years

Features & Applications

Task adjustable linear fitting offers an ideal solution for retailers with the ability to adjust two parallel linear strips of light at different angles, focusing them independently on opposite sides of the supermarket aisle.

Task is available up to 15,600Lm with a choice of three diffusers and can be either surface/track mounted or suspended.

*DIA - Diamond light diffuser | FRO - Frosted light diffuser | CRS - Crosswise stripped light diffuser
 **H - Depends on mounting solution: 3-phase track H=138; surface, suspended H=81