



Leo 50W Datasheet

50W Linkable LED Pendant

PXLEO50

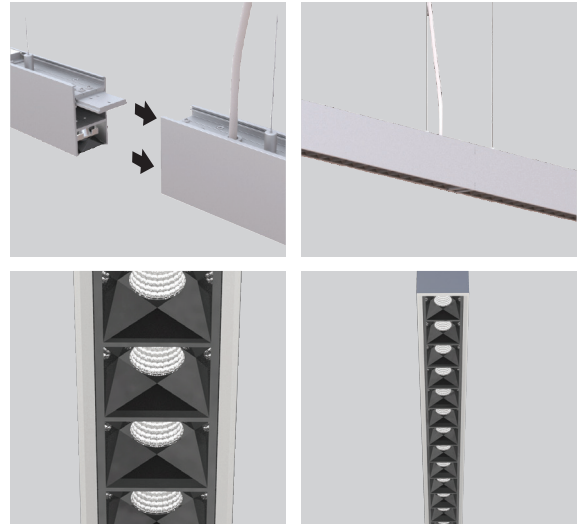

Dimensions	1175*38*66mm
Input Voltage	AC100~270V
Input Power	25W Up/25W Down
Power Factor	≥0.9
Housing Color	Silver/White
Luminous Flux	3250lm Up/3250lm Down
Color Rendering Index	>80
Life Time	50,000H
Fixture Material	6063AL
CCT	4000K
LEDs	88pcs
Protection Level	IP 20
Working Temperature	-20°C~+45°C
UGR	<6
Dimmable	DALI Dimmable
Luminous Efficacy	130lm/W
Warranty	5 Years
Product Code	PXLEO50

Features & Applications

Designed with elegance and simplicity in mind, the Prelux Leo 50W is ideal for a broad range of architectural spaces from commercial offices to retail stores and public buildings.

The Leo produces a highly efficient 130lm/W while the linkable design provides the added flexibility of being able to create a continuous suspended line of light.

Leo is also available in a twin 60W version.