

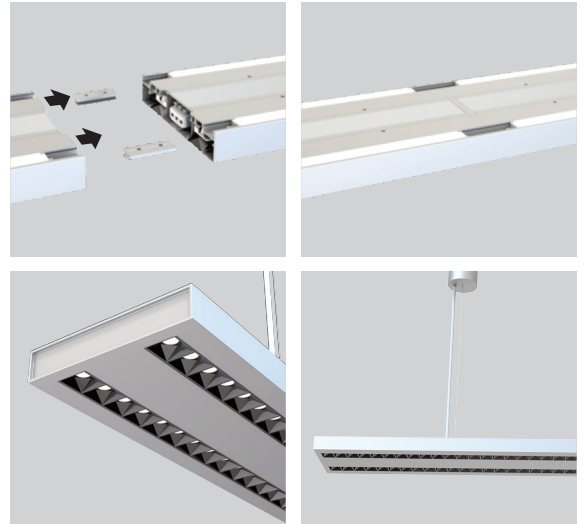


## Leo 60W Datasheet

60W Linkable LED Pendant

PXLEO60

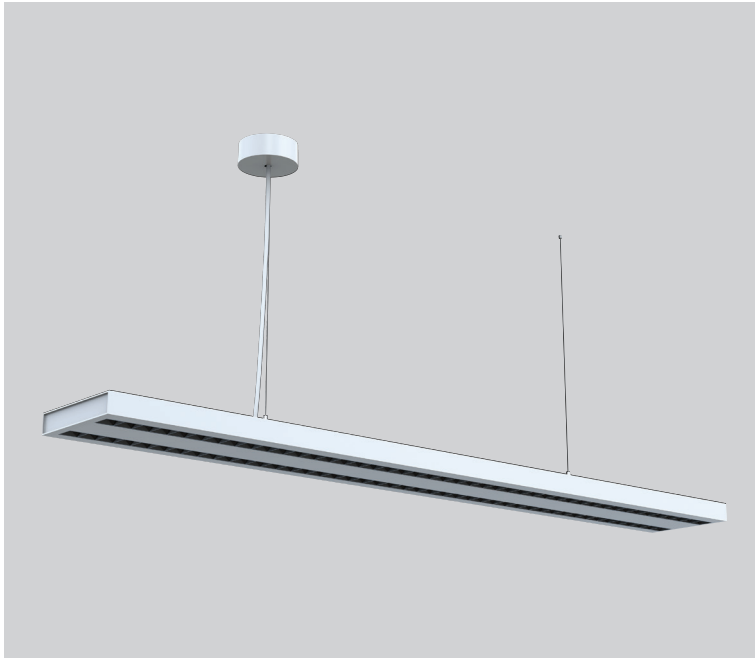

<b>Dimensions</b>	1190*160*30mm
<b>Input Voltage</b>	AC100~270V
<b>Input Power</b>	30W Up/30W Down
<b>Power Factor</b>	≥0.9
<b>Housing Color</b>	Silver/White
<b>Luminous Flux</b>	3900lm Up/3900lm Down
<b>Color Rendering Index</b>	>80
<b>Life Time</b>	50,000H
<b>Fixture Material</b>	6063AL
<b>CCT</b>	4000K
<b>LEDs</b>	176pcs
<b>Protection Level</b>	IP 20
<b>Working Temperature</b>	-20°C~+45°C
<b>UGR</b>	<6
<b>Dimmable</b>	DALI Dimmable
<b>Luminous Efficacy</b>	130lm/W
<b>Warranty</b>	5 Years
<b>Product Code</b>	PXLEO60

### Features & Applications

Designed with elegance and simplicity in mind, the Prelux Leo 60W is ideal for a broad range of architectural spaces from commercial offices to retail stores and public buildings.

The Leo produces a highly efficient 130lm/W while the linkable design provides the added flexibility of being able to create a continuous suspended line of light.

Leo is also available in a single 50W version.