





## Ledline CCT Datasheet

40W 1200mm Linkable LED Surface/Suspended

PXPRO40WCCT

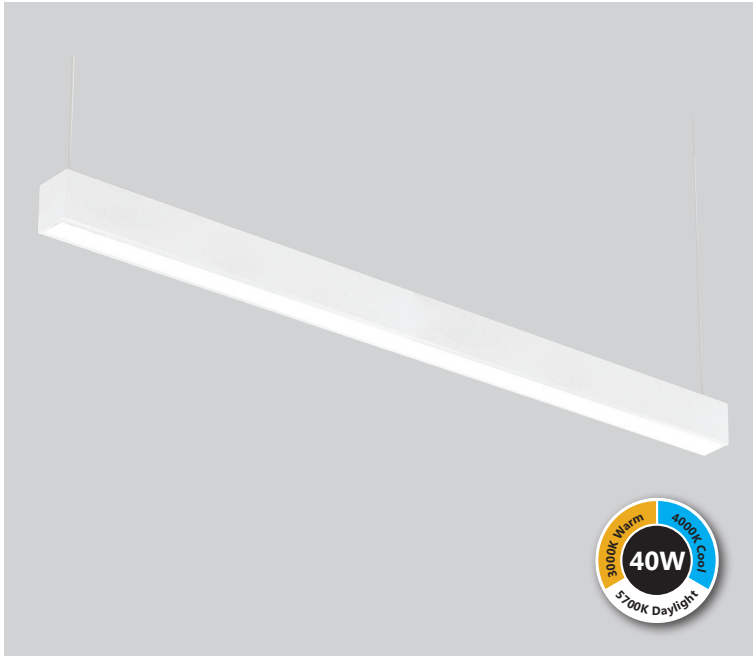

<b>Dimensions</b>	1204*60*70mm
<b>Input Voltage</b>	AC200~240V
<b>Input Power</b>	40W
<b>Power Factor</b>	≥0.9
<b>Beam Angle</b>	100°
<b>Housing Color</b>	White RAL 9016
<b>Luminous Flux</b>	4400-4800lm
<b>Colour Rendering Index</b>	>80
<b>Life Time</b>	50,000h
<b>Fixture Material</b>	PC/Aluminium
<b>Colour Temperature</b>	3000K / 4000K / 5700K
<b>LED</b>	SMD
<b>Protection Level</b>	IP20
<b>Storage Temperature</b>	-40°C~+65°C
<b>Working Temperature</b>	-20°C~+45°C
<b>Dimmable</b>	No
<b>Luminous Efficacy</b>	110-120lm/W
<b>Installation</b>	Surface Mounted/Suspended Pendant
<b>Warranty</b>	3 Years

## Features & Applications

The Ledline is a beautifully designed fitting in the contemporary minimalist style which can either be surface mounted or suspended as a pendant. The on-trend sleek appearance also makes it suitable for both domestic and commercial applications.

The versatility of the Ledline is further enhanced by the colour temperature selectable switch providing warm, cool and daylight options.

The linkable design also enables the fitting to be used for applications requiring a continuous line of light, such as corridors and open plan office spaces.