


Prowler 10W PIR 4000K Datasheet

IP44 850lm LED Floodlight

PXPR10WPBY

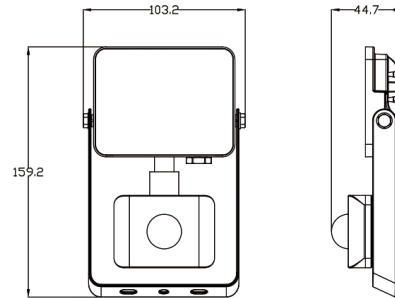

RoHS

IP44

LED

10W



Dimensions	103.2*159.2*44.7mm
Input Voltage	220V-240V AC 50Hz
Input Power	10W
Power Factor	≥0.5
Beam Angle	110°
Housing Material	Aluminium
Luminous Flux	850lm
Color Rendering Index	≥70
Life Time	20,000h
CCT	4000K
LEDs	SMD 2835
Protection Level	IP44
Net Weight	265g
Warranty	3 Years

Features & Applications

Prelux Prowler LED Floodlights provide up to 70% energy savings compared to non-LED Floods.

The range is maintenance free and IP54 rated for outdoor applications making it ideal for general exterior/security lighting, garden lighting and commercial/industrial lighting applications.

The adjustable bracket enables the beam to be oriented and fixed at the required angle.