



Stadium 600W 10° Datasheet

5000K 76500Lm IP66 LED Floodlight

PXSTAD610

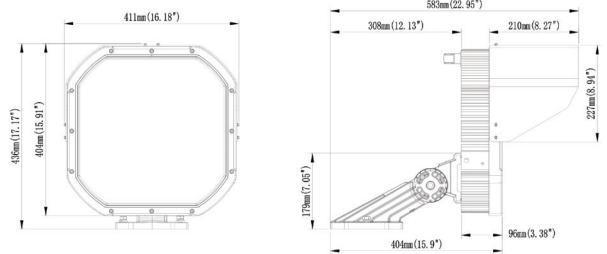

Debugging
gunsight:
PXGUN
to be ordered
separately



RoHS

IP66

LED

600W

Dimensions	400*430*583mm
Input Power	600±3W
LED Type	Osram LED
Lumens (±5%)	76500
Efficiency	130(±5%)Lm/W
CCT	5000K
Color Rendering Index	>70
Beam Angle	10°
Input Voltage	AC100-240V
Power Frequency	50/60Hz
Power Factor	>0.92
Surge Protection	6kV line-line, 10kV line-earth
Ingress Protection	IP66 Waterproof
Lifetime	>50000h (Ta=30°C@L70)
Operating Temperature	-30°C to +50°C(-22°F to +122°F)
Luminaire Net Weight	11.5±0.3kg
Installation	Pole Mounting
Certification	CE, RoHS, SAA
Warranty	5 Years

Features & Applications

- High lumen efficacy up to 130Lm/W
- Cold forged for superior temperature management
- Available in 10° or 30° beam angles
- IP66 protection rating
- 5 years warranty