



## Stadium 600W 30° Datasheet

5000K 79642Lm IP66 LED Floodlight

PXSTAD630

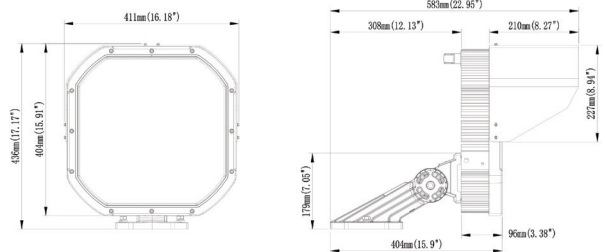

RoHS

IP66

LED

600W

<b>Dimensions</b>	400*430*583mm
<b>Input Power</b>	600±3W
<b>LED Type</b>	Osram LED
<b>Lumens (±5%)</b>	79642
<b>Efficiency</b>	130(±5%)Lm/W
<b>CCT</b>	5000K
<b>Color Rendering Index</b>	>70
<b>Beam Angle</b>	30°
<b>Input Voltage</b>	AC100-240V
<b>Power Frequency</b>	50/60Hz
<b>Power Factor</b>	>0.92
<b>Surge Protection</b>	6kV line-line, 10kV line-earth
<b>Ingress Protection</b>	IP66 Waterproof
<b>Lifetime</b>	>50000h (Ta=30°C@L70)
<b>Operating Temperature</b>	-30°C to +50°C(-22°F to +122°F)
<b>Luminaire Net Weight</b>	11.5±0.3kg
<b>Installation</b>	Pole Mounting
<b>Certification</b>	CE, RoHS, SAA
<b>Warranty</b>	5 Years

### Features & Applications

- High lumen efficacy up to 130Lm/W
- Cold forged for superior temperature management
- Available in 10° or 30° beam angles
- IP66 protection rating
- 5 years warranty