



Liberty 60W Datasheet

5000K 7200Lm IP66 LED 76mm Post Top

PXLIBPT60

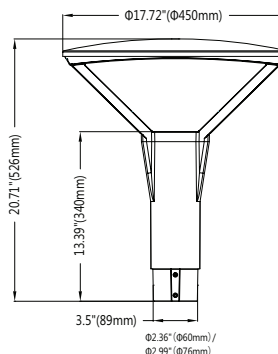

Type V (R01201)
Average Beam Angle: 155.9°

| | | | | | |
|--|------|------|-----|-----|----------|
| | RoHS | IP66 | LED | 60W | 120 Lm/W |
|--|------|------|-----|-----|----------|

| | |
|------------------------------|----------------------------------|
| Dimensions | 450*450*526mm |
| Input Voltage | AC100-240V |
| Power Frequency | 50/60Hz |
| Power Factor | >0.9 |
| Input Power | 60W |
| Lumens (±5%) | 7200 |
| Efficiency | 120Lm/W |
| Surge Protection | Line-Line 6kV, Line-PE 10kV |
| Driver Type | Constant Current |
| Beam Type | Type V (R01201) Symmetrical |
| Color Rendering Index | Ra70 |
| Ingress Protection | IP66 Waterproof |
| Colour Temperature | 5000K |
| Lifetime | >50000h (@77°F / 25°C) |
| Operating Temperature | -30°C to +50°C (-22°F to +122°F) |
| Luminaire Net Weight | 7.12±0.2kg (15.69±0.44Lbs) |
| Certification | CE |
| Warranty | 5 Years |

Features & Applications

- Contemporary Architectural Design
- Symmetrical Beam Type V
- Optic Lens Provides Uniform Light
- Highly Efficient 120Lm/W
- Housing Design Minimizes Light Pollution.
- IP66 Ingress Protection Rating
- 50,000 Hour Lifetime (@77°F / 25°C)