


PRELUX

Unipro Lighting Track Datasheet

Universal Lighting Track System

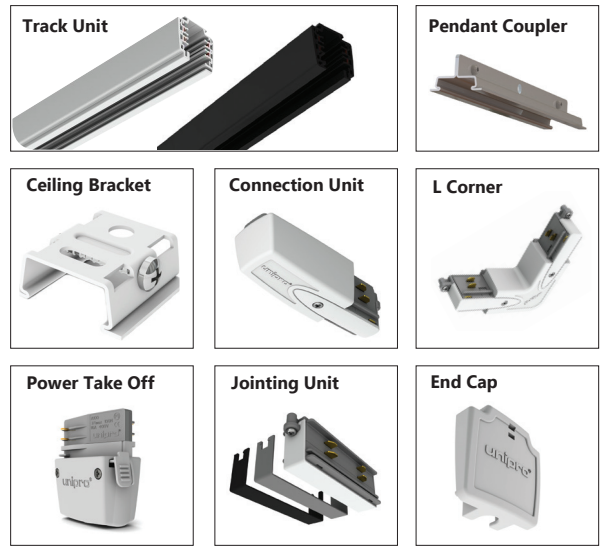

| Part Codes | White Version | Black Version |
|-------------------|---------------|---------------|
| 2m Track Unit | P1459102 | P1459302 |
| 3m Track Unit | P1459103 | P1459303 |
| Jointing Unit | P1459199 | P1459199 |
| Ceiling Bracket | P1459401 | P1459403 |
| L Corner | P1459141 | P1459341 |
| Pendant Coupler | P1459431 | P1459433 |
| Power Take Off | P1459011 | P1459012 |
| Connection Unit | P1459121 | P1459321 |
| End Cap | P1459181 | P1459381 |
| Monopoint | P1459040 | P1459041 |
| Adjustable Corner | P1459151 | P1459351 |
| T Piece (A) | P1459161 | P1459361 |
| T Piece (B) | P1459162 | P1459362 |
| Wire Suspension | P1459411 | |

| | |
|---------------------------------------|---|
| Frame Material | Extruded Aluminium |
| Insulation Profiles | Plastic |
| Phase & Neutral Conductors | 2.5mm ² Rectangular Copper |
| Plastic Accessory Material | Self Extinguishing Polycarbonate, Class V0 |
| Surface Treatment | Powder Coated & Anodised |
| Available Colours* | White (RAL9010) / Grey (RAL7040) / Black (RAL9005) |
| Conductors | Three phase conductors (L1, L2 & L3) neutral (N) & ground (PE). |
| Protection Class | IP20 |
| Quality and Safety | Tested in accordance with the standards EN60570 and EN60598 |
| Other | Can be cut to size on site |

Features & Applications

- Compatible with most common spotlight systems.
- The polarity of the L-corner and jointing unit colour can be changed on site as necessary.
- Comes in easy to cut 2 and 3 metre lengths.
- Easy to install with pre-cut holes at 50 cm intervals.
- Easy to connect with reliable and easy to use screw terminals, which are suitable for stranded or solid wires with a maximum cross section of 2.5 mm².