



Lena 10W (Silver) Datasheet

3000K 640lm LED Downlight

PXLENA10S

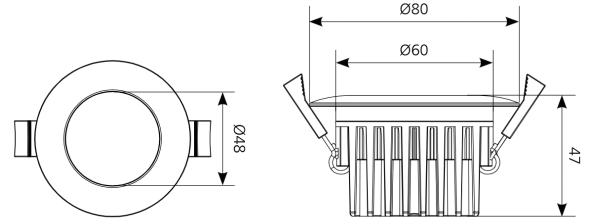

Beam Angle

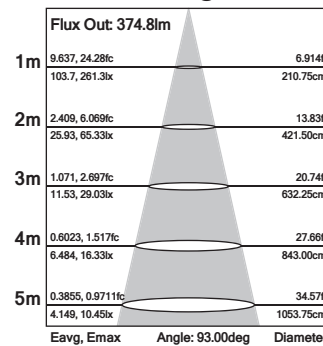

RoHS

IP44

LED

10W



Dimensions	Ø80*47mm Cutout Ø65mm
Input Rated Voltage	AC230V 50Hz
Input Voltage	AC200-240V
Efficiency	≥78%
Total Load Wattage	10W±1W
Power Factor	≥0.9
Lumens	640lm
Beam Angle	90°
Lifespan	40,000h
CRI	≥80
Rated Input Current	≤0.05A
Full Load Output Voltage	DC29-33V
Rated Output Current	250mA
Output Current Range	250mA±5%
Power Tolerance	±5%
Current Output Tolerance	±5%
Dimmable	Triac Dimmable
Short Circuit Protection	PASS
Over Voltage Protection	PASS
Over Temperature Protection	PASS
Withstand Voltage	AC3750V

Features & Applications

The Prelux Lena 10W LED Downlight adopts a high lumen SMD LED, PMMA diffuser with even light output. White or silver surface treatments are available. Lena downlights are Triac dimmable.

- Environment friendly, without Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Triac dim, 0-10V dim
- 90° wide beam angle
- Ø65mm cutout
- CCT: 3000K
- No UV/IR light