



## Lena 10W (White) Datasheet

3000K 640lm LED Downlight

PXLENA10W

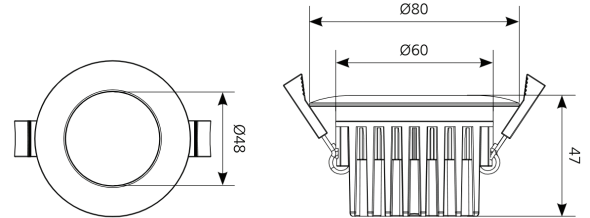

### Beam Angle



RoHS

IP44

LED

10W



<b>Dimensions</b>	Ø80*47mm Cutout Ø65mm
<b>Input Rated Voltage</b>	AC230V 50Hz
<b>Input Voltage</b>	AC200-240V
<b>Efficiency</b>	≥78%
<b>Total Load Wattage</b>	10W±1W
<b>Power Factor</b>	≥0.9
<b>Lumens</b>	640lm
<b>Beam Angle</b>	90°
<b>Lifespan</b>	40,000h
<b>CRI</b>	≥80
<b>Rated Input Current</b>	≤0.05A
<b>Full Load Output Voltage</b>	DC29-33V
<b>Rated Output Current</b>	250mA
<b>Output Current Range</b>	250mA±5%
<b>Power Tolerance</b>	±5%
<b>Current Output Tolerance</b>	±5%
<b>Dimmable</b>	Triac Dimmable
<b>Short Circuit Protection</b>	PASS
<b>Over Voltage Protection</b>	PASS
<b>Over Temperature Protection</b>	PASS
<b>Withstand Voltage</b>	AC3750V

### Features & Applications

The Prelux Lena 10W LED Downlight adopts a high lumen SMD LED, PMMA diffuser with even light output. White or silver surface treatments are available. Lena downlights are Triac dimmable.

- Environment friendly, without Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Triac dim, 0-10V dim
- 90° wide beam angle
- Ø65mm cutout
- CCT: 3000K
- No UV/IR light