



## Pisa 10W Datasheet

10W 3000K 850lm LED Downlight

PXPA3

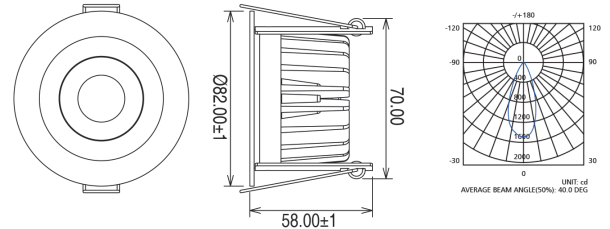

### Beam Angle



<b>Dimensions</b>	Ø82*58mm Cutout Ø70-75mm
<b>Input Rated Voltage</b>	AC230V 50Hz
<b>Input Voltage</b>	AC200-240V
<b>Efficiency</b>	≥75%
<b>Total Load Wattage</b>	10W±1W
<b>Power Factor</b>	≥0.9
<b>Lumens</b>	850lm
<b>Beam Angle</b>	36°
<b>Lifetime</b>	40,000h
<b>CRI</b>	≥80
<b>Rated Input Current</b>	≤0.06A
<b>Full Load Output Voltage</b>	DC33-38V
<b>Rated Output Current</b>	220mA
<b>Output Current Range</b>	220mA±5%
<b>Power Tolerance</b>	±5%
<b>Current Output Tolerance</b>	±5%
<b>Dimming Range</b>	8%-100%
<b>Dimmer</b>	Triac Dimmers
<b>Short Circuit Protection</b>	PASS
<b>Over Voltage Protection</b>	PASS
<b>Over Temperature Protection</b>	PASS

### Features & Applications

The Prelux Pisa 10W LED Downlight achieves a highly efficient 100 LPW by adopting super high lumen output COB LEDs coupled with a prismatic lens.

The smart cooling system is specially designed with vertical cooling fins to allow air to flow smoothly around the fixture for excellent heat dissipation.

- Environmentally friendly, without Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Dimmable when using Triac Dimmer
- 36° beam angle
- Ø70-75mm cutout
- No UV/IR light