



Pluto 35W 4000K Datasheet

2595Lm Adjustable LED Downlight

PXPLU35W

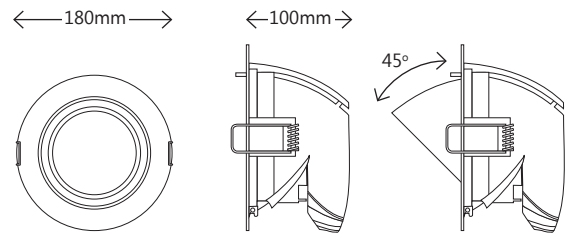

Dimensions	Ø180*100mm Cutout Ø160mm
Input Voltage	AC100-240V 50/60Hz
Input Power	35W±5%
Efficiency	≥87%
Power Factor	≥0.9
Beam Angle	60°
Rated Input Current	≤0.39A
Full Load Output Voltage	DC29-33V
Rated Output Current	1000mA
Output Current Range	1000mA±5%
Housing Color/Material	White / AL6063 Aluminium
Luminous Flux	2595lm
Color Rendering Index	≥80
Life Time	40,000h
CCT	4000K
LEDs	CREE COB
Protection Level	IP20
Working Temperature	-20°C~+45°C
Dimmable	No
Warranty	3 Years

Features & Applications

- The Pluto adjustable LED downlight comes with CREE COB LEDs for excellent colour rendition.
- The die-cast aluminium heat sink provides excellent thermal dissipation.
- The fitting is tiltable 45° making it an ideal option for retail stores and commercial premises.