



Torino 10W 4000K Datasheet

780lm LED Downlight

PXTOR10W4K

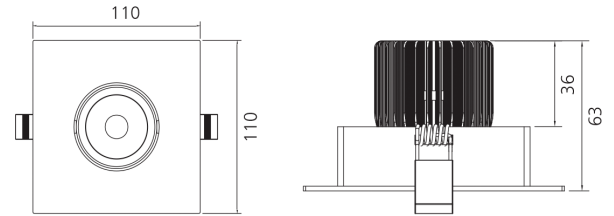

Beam Angle

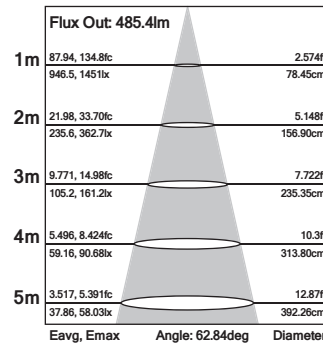

RoHS

IP20

LED



Dimensions	L110*W110*H63mm
Cutout	L90*W90mm
Input Rated Voltage	AC100-240V
Frequency	50/60Hz
Input Voltage	AC85-265V
Efficiency	≥86%
Total Load Wattage	10W±1W
Power Factor	≥0.9
Rated Input Current	≤0.12A
Full Load Output Voltage	DC35-40V
Rated Output Current	240mA
Output Current Range	240mA±5%
Power Tolerance	±5%
Current Output Tolerance	±5%
Beam Angle	60°
Lifetime	40,000h
CRI	≥80
Short Circuit Protection	PASS
Over Voltage Protection	PASS
Over Temperature Protection	PASS
Withstand Voltage	AC3750V

Features & Applications

The Prelux Torino 10W rectangular LED recessed light is uniquely designed with a COB high power LED chip. The anti-glare lens provides an excellent lighting effect without glare or shadow. Single head and double head available for wide choice.

The adjustable lighting direction offers various lighting orientations.

- Environment friendly, no Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- 60° wide beam angle
- L90*W90mm cutout
- Colour Temperature: 3000K
- Adjustable and rotary
- No UV/IR light