



Empire Pro II 150W Datasheet

5000K 18750Lm IP66 LED Floodlight

PXEMP150V2

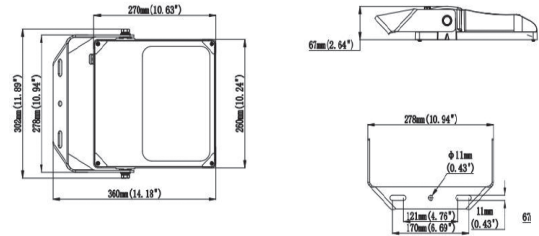

Beam Angle



CE	RoHS	IP66	LED	150W	125 Lm/W
-----------	-------------	-------------	------------	-------------	-----------------

Dimensions	360*302*67mm
Input Voltage	AC100-240V
Power Frequency	50/60Hz
Power Factor	>0.9
Lumens (±5%)	18750
Efficiency	125Lm/W
Beam Angle	F19201 (55 x 125°)
Color Rendering Index	>70
Ingress Protection	IP66 Waterproof
CCT	5000K
Lifetime	>50000h (Ta=30°C@L70)
Operating Temperature	-30°C to +50°C (-22°F to +122°F)
Luminaire Net Weight	3.9±0.3kg (8.6±0.66Lbs)
Certification	CE
Warranty	5 Years

Features & Applications

- Highly Efficient Up to 125Lm/W
- Polarized Design Minimizes Light Pollution.
- Protective Wire-guard Available
- IP66 Ingress Protection Rating
- 50,000 Hour Lifetime (Ta=30°C@L70)