



Empire Pro II 50W Datasheet

5000K 6250Lm IP66 LED Floodlight

PXEMP50V2

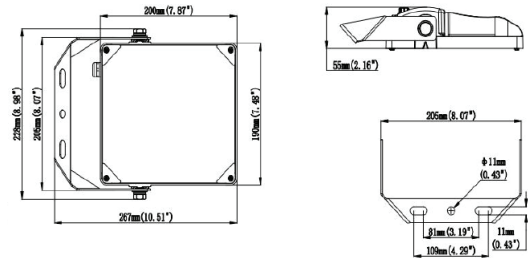

Beam Angle



F06401



RoHS

IP66

LED

50W

125
Lm/W

Dimensions	267*228*55mm
Input Voltage	AC100-240V
Power Frequency	50/60Hz
Power Factor	>0.9
Input Power	50W
Lumens (±5%)	6250
Efficiency	125Lm/W
Beam Angle	F06401 (55 x 125°)
Color Rendering Index	>70
Ingress Protection	IP66 Waterproof
CCT	5000K
Lifetime	>50000h (Ta=30°C@L70)
Operating Temperature	-30°C to +50°C (-22°F to +122°F)
Luminaire Net Weight	1.8±0.3kg (3.9±0.66Lbs)
Certification	CE
Warranty	5 Years

Features & Applications

- Highly Efficient Up to 125Lm/W
- Polarized Design Minimizes Light Pollution.
- Protective Wire-guard Available
- IP66 Ingress Protection Rating
- 50,000 Hour Lifetime (Ta=30°C@L70)