



Universal Microwave Kit Datasheet

IP20 10-16m Fully Adjustable Time Settings

PXMWKIT

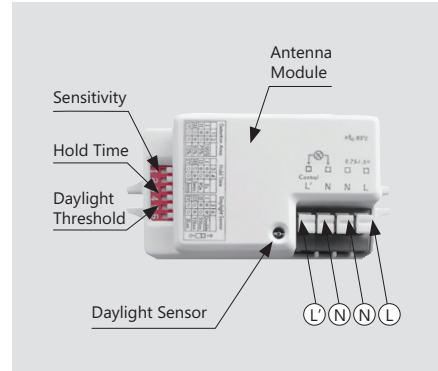

Dimensions	80.4*36.5*23.5mm
Voltage	220-240V 50/60Hz
Standby Power	0.5W
Sensitivity	10% / 50% / 75% / 100%
HF System	5.8GHz CW radar
Rated Load	800W (resistive), 400W (capacitive)
Daylight Sensor	2Lux / 10Lux / 50Lux / Disable
Detection Area	10-16m
Time Setting	5 sec / 90 sec / 5 min / 15 min
Detection Angle	30° ~ 150°
Operating Temp	-20°C ~ +60°C
Protection Rating	IP20
Certification	CE
Fitting Warranty	3 Years

Features & Applications

The Prelux Universal Microwave Kit enables standard fittings to be retrofitted with presence detection for energy saving purposes.

Detection sensitivity can be adjusted between 10-100% by selecting the combination on the DIP switches. Hold-time can also be adjusted with 4 setting options between 5 seconds and 15 mins.

Different daylight thresholds can also be preset. The light will always turn on upon movement if daylight sensor is disabled.