
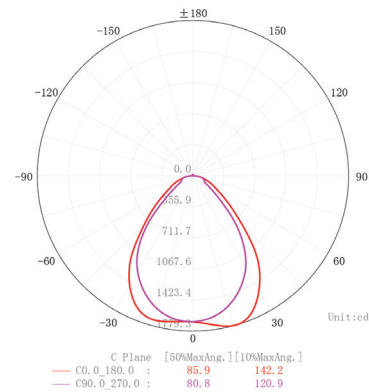
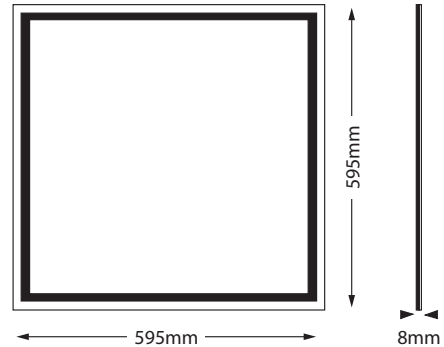


Elsa (UGR<19) 32W 600x600 Datasheet

4000K 3000Lm Recessed LED Panel

PX665UGRY

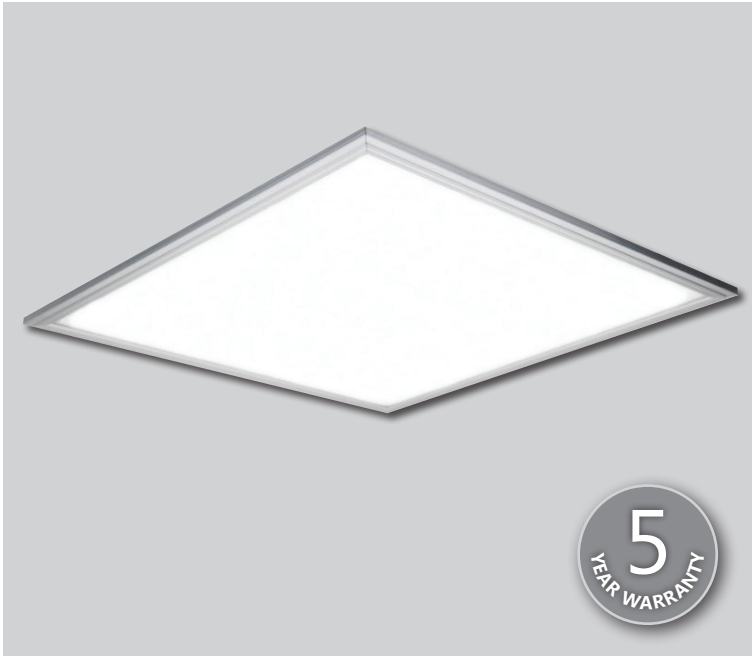

Dimensions (mm)	595*595
Weight (kg)	2.16
Material	Aluminium & PC
Colour/Finish	White
IK Rating	04
Voltage/Frequency	220-240V 50/60Hz
Luminous Flux	3000lm
Luminous Efficacy	94lm/w
Color Rendering Index	80
CCT Colour Temp	4000K
SDCM Colour Consistency	<6
UGR Unified Glare Rating	UGR<19
LEDs	192pcs
Light Control	On/Off
Beam Angle	110°
Adjustable	No
Chip	4014
IP Rating	20
Maintained Luminous Flux	(L80B10) 50,000h
Warranty	5 years

Features & Applications

The Prelux Elsa 32W UGR <19 600 x 600 Edge-light LED panel is a white LED based edge lighting product designed with high quality LGP (light guide plate) for illumination applications. It has many advantages over traditional fluorescent tube fixtures with its features of soft and uniform brightness, energy efficiency, thinner frame, long lifetime and is also maintenance-free.

Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.

Options Available	
Light Controls	Casambi *CM / Dali *D
Drivers	Dali PXDADRY / Triac PXTRDRY
3 Hr Emergency	PXEMPACK
Surface Kit	PXSURFKIT600Y
Wire Suspension Kit	PXWIREY