




## Oslo Multi Watt Microwave Datasheet

10/14/20W 1000/1400/2000Lm LED Bulkhead/Ceiling Light

PXOSMMW

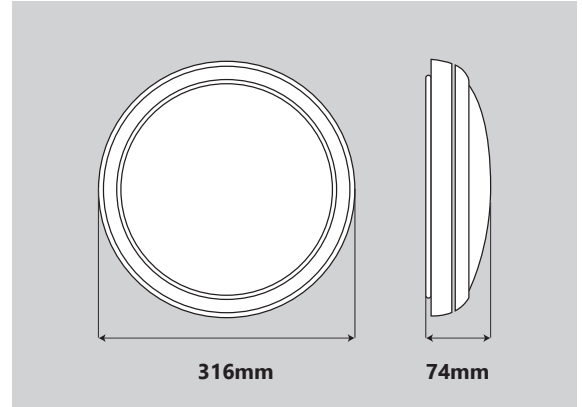

Detection Range: 10m(W) x 6m(H)  
 Detection Angle: 30°~150°  
 Hold Time: 5s / 90s / 5min / 15min  
 Standby Power: 0.5W

<b>CE</b>	<b>UK CA</b>	<b>Multi Watt</b>	<b>IP65</b>	<b>LED</b>	<b>240V</b>
-----------	------------------	-----------------------	-------------	------------	-------------

<b>Dimensions</b>	316*316*74mm
<b>Input Voltage</b>	200~240V 50/60Hz
<b>Wattage</b>	Power Selectable 10W/14W/20W
<b>Power Factor</b>	≥0.75
<b>Beam Angle</b>	120°
<b>Housing Color</b>	White
<b>Luminous Flux</b>	1000Lm (10W), 1400lm (14W), 2000Lm (20W)
<b>Color Rendering Index</b>	>80
<b>Lifetime</b>	35,000Hrs
<b>Fixture Material</b>	PC & ABS
<b>CCT</b>	3000K / 4000K / 6000K
<b>LEDs</b>	140pcs SMD
<b>Protection Level</b>	IP65
<b>Storage Temperature</b>	-30°C~+60°C
<b>Working Temperature</b>	-20°C~+45°C
<b>Luminous Efficacy</b>	100lm/W
<b>Certification</b>	CE, UKCA
<b>Warranty</b>	5 Years

### Features & Applications

At just 74mm in depth, the Prelux Oslo Multi-Wattage is the slimmest model to date. The compact body coupled with the screwless Twist & Lock cover also makes it a more aesthetically pleasing choice for functional bulkhead lighting.

The Oslo Multi-Wattage comes with 10W/14W/20W options in a single fitting and 3 colour temperatures: warm, cool and daylight for even greater flexibility.

The IP65 protection rating also makes it suitable for an extensive range of applications, including corridors, stairwells and toilet facilities.

Options Available	
<b>Black Eyelid Bezel</b>	PXOSBZ2
<b>White Eyelid Bezel</b>	PXOSBZ3
<b>Chrome Bezel</b>	PXOSBZ4