
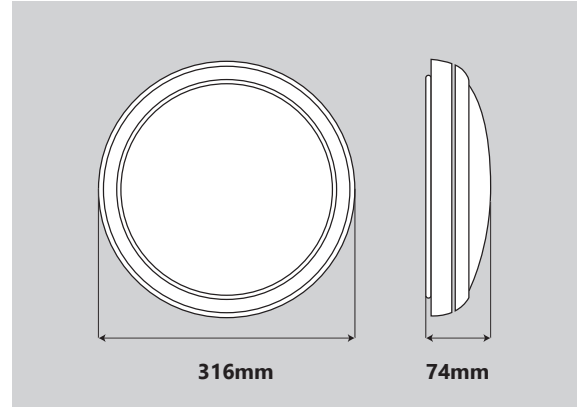




Oslo Multi Watt MWEM Datasheet

10/14/20W 1000/1400/2000Lm LED Bulkhead/Ceiling Light

PXOSMMWEM

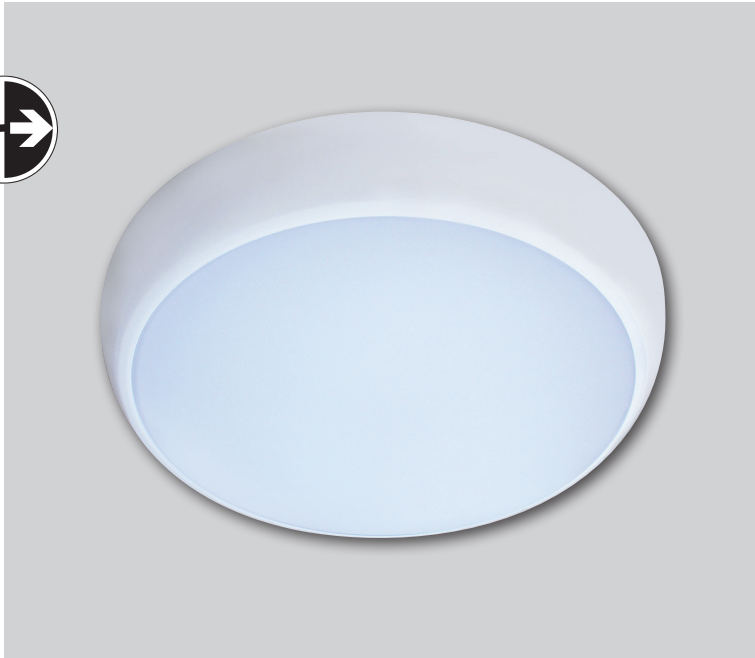

Detection Range: 10m(W) x 6m(H)
 Detection Angle: 30°~150°
 Hold Time: 5s / 90s / 5min / 15min
 Standby Power: 0.5W

Dimensions	316*316*74mm
Input Voltage	200~240V 50/60Hz
Wattage	Power Selectable 10W/14W/20W
Emergency Mode	3-4h @ 2-3W
Battery Type	LiFePO4
Power Factor	≥0.75
Beam Angle	120°
Housing Color	White
Luminous Flux	1000lm (10W), 1400lm (14W), 2000lm (20W)
Color Rendering Index	>80
Lifetime	35,000Hrs
Fixture Material	PC & ABS
CCT	3000K / 4000K / 6000K
LEDs	140pcs SMD
Protection Level	IP65
Storage Temperature	-30°C~+60°C
Working Temperature	-20°C~+45°C
Luminous Efficacy	100lm/W
Certification	CE, UKCA
Warranty	5 Years

Features & Applications

At just 74mm in depth, the Prelux Oslo Multi-Wattage is the slimmest model to date. The compact body coupled with the screwless Twist & Lock cover also makes it a more aesthetically pleasing choice for functional bulkhead lighting.

The Oslo Multi-Wattage comes with 10W/14W/20W options in a single fitting and 3 colour temperatures: warm, cool and daylight for even greater flexibility.

The IP65 protection rating also makes it suitable for an extensive range of applications, including corridors, stairwells and toilet facilities.

Options Available	
Black Eyelid Bezel	PXOSBZ2
White Eyelid Bezel	PXOSBZ3
Chrome Bezel	PXOSBZ4