


Valo 50W 4000K Datasheet

7,500lm LED Street Light

PXVALO50W



Complete with NEMA Socket

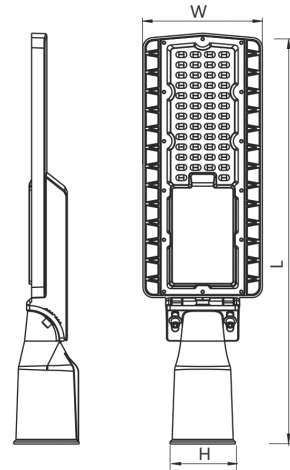

Tiltable 30°




Horizontal or Perpendicular Installation



Enlarging 76mm Spigot Available (to be ordered separately)

Product Code: PXSP76

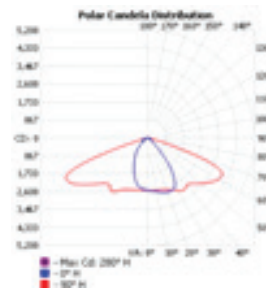

CE	UK CA	50W	IP66	LED	240V
----	-------	-----	------	-----	------

Dimensions	494*155*76mm
Wattage	50W
Weight	1.72kg
Material	Aluminum+PC
Colour/Finish	RAL9023
IK Rating	IK08
Voltage/Frequency	AC100-240V/50-60Hz
Luminous Flux	7,500Lm
Luminous Efficacy	150Lm/W
Color Rendering Index	70
Colour Temperature	4000K
SDCM Colour Consistency	≤6
UGR Unified Glare Rating	-
LEDs	90pc
Light Control	On/off
Beam Angle	Type II, Medium
Adjustable	-15 to +15 degrees
Chip	SMD 3030
IP Rating	IP66
Maintained Luminous Flux	(L80B10) 60,000h
Warranty	5 years

Features & Applications

- Tiltable 30°
- 4000K colour temperature
- Highly Efficient 150 Lm/W
- Excellent photometric design
- Complete with NEMA socket
- IP65 protection rating
- 60mm pole diameter size
- 76mm spigot available (to be ordered separately)
- 50,000 hour lifetime
- Excellent heat dissipation to extend the life of the LEDs.
- 5 year warranty

Options Available	
76mm Spigot	PXSP76
Photocell Kit Code	PXPCHEAD