
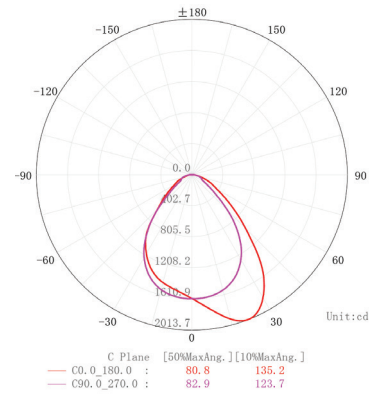


## Elsa (UGR<19) 36W 1200x300 Datasheet

4000K 3200Lm Recessed LED Panel

PX1235Y4KUGR

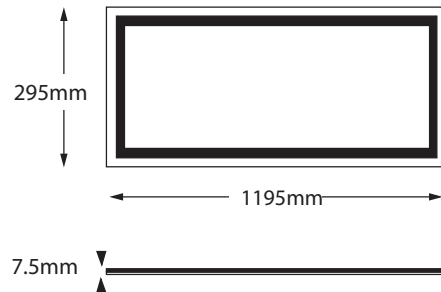

<b>Dimensions (mm)</b>	295*1195
<b>Weight (kg)</b>	2.3
<b>Material</b>	Aluminium & PC
<b>Colour/Finish</b>	White
<b>IK Rating</b>	04
<b>Voltage/Frequency</b>	220-240V 50/60Hz
<b>Luminous Flux</b>	3200lm
<b>Luminous Efficacy</b>	89lm/w
<b>Color Rendering Index</b>	80
<b>CCT Colour Temp</b>	4000K
<b>SDCM Colour Consistency</b>	<6
<b>UGR Unified Glare Rating</b>	UGR<19
<b>LEDs</b>	180pcs
<b>Light Control</b>	On/Off
<b>Beam Angle</b>	110°
<b>Adjustable</b>	No
<b>Chip</b>	4014
<b>IP Rating</b>	20
<b>Maintained Luminous Flux</b>	(L80B10) 50,000h
<b>Warranty</b>	5 years

## Features & Applications

The Prelux Elsa 36W UGR <19 1200 x 300 Edge-light LED panel is a white LED based edge lighting product designed with high quality LGP (light guide plate) for illumination applications. It has many advantages over traditional fluorescent tube fixtures with its features of soft and uniform brightness, energy efficiency, thinner frame, long lifetime and is also maintenance-free.

### Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.

Options Available	
<b>Light Controls</b>	Dali *D
<b>Drivers</b>	Dali PXDADRY42W
<b>3 Hr Emergency</b>	PXEMPACK
<b>Surface Kit</b>	PXSURFKIT1200Y
<b>Wire Suspension Kit</b>	PXWIREY