


## Milano 13W IP65 Non-Dim Datasheet

3000K 1200Lm LED Downlight

PXMIL13W

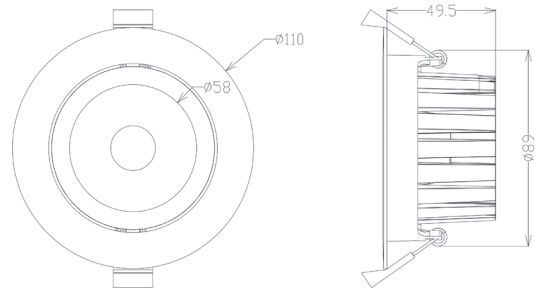

<b>Dimensions (mm)</b>	Ø110*49.5mm Cutout Ø90-95mm
<b>Weight (kg)</b>	0.46
<b>Material</b>	Aluminium & PC
<b>Colour/Finish</b>	White RAL9016
<b>IK Rating</b>	IK08
<b>Voltage/Frequency</b>	220-240V 50/60Hz
<b>Luminous Flux</b>	1200lm
<b>Luminous Efficacy</b>	92lm/w
<b>Color Rendering Index</b>	80
<b>CCT Colour Temp</b>	3000K
<b>SDCM Colour Consistency</b>	<3
<b>UGR Unified Glare Rating</b>	-
<b>LEDs</b>	COB
<b>Light Control</b>	On/Off
<b>Beam Angle</b>	60°
<b>Adjustable</b>	Tilts 30°
<b>Chip</b>	CREE
<b>IP Rating</b>	65
<b>Maintained Luminous Flux</b>	40,000h
<b>Warranty</b>	5 years

### Features & Applications

The Prelux Milano 13W LED recessed downlight has a super slim and compact design, perfectly suited for narrow ceiling installations. The diamond patterned surface lens ensures high light transmittance and uniform output. The T-shaped heat sink greatly improves cooling efficiency and the fitting can also be tilted 30 degrees to direct the light to specific areas.

- Long lifetime of 40,000 hours
- IP65 protection rating
- 60° wide beam angle
- Tilts 30°
- Ø90-95mm cutout
- CCT: 3000K
- 5 years warranty

Options Available	
<b>Light Controls</b>	Casambi *CM / Dali *D
<b>3 Hr Emergency</b>	PXEMPACK