
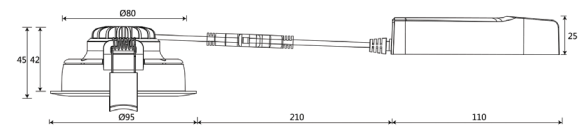


Milano 8W IP54 Dimmable Datasheet

3000K 600Lm LED Downlight

PXMILIP548W

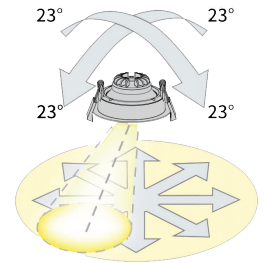

| | | | | | |
|----|----------|----|------|-----|------|
| CE | UK CA | 8W | IP54 | LED | 240V |
|----|----------|----|------|-----|------|

| | |
|---------------------------------|--------------------------|
| Dimensions (mm) | Ø95*45mm Cutout Ø83-86mm |
| Weight (kg) | 0.31 |
| Material | Aluminium & PC |
| Colour/Finish | White RAL9016 |
| IK Rating | IK03 |
| Voltage/Frequency | 220-240V 50Hz |
| Luminous Flux | 600lm |
| Luminous Efficacy | 75lm/w |
| Color Rendering Index | 80 |
| CCT Colour Temp | 3000K |
| SDCM Colour Consistency | <6 |
| UGR Unified Glare Rating | - |
| LEDs | COB |
| Light Control | Triac Dimming |
| Beam Angle | 60° |
| Adjustable | Tilts 23° |
| Chip | Edison |
| IP Rating | 54 |
| Maintained Luminous Flux | 50,000h |
| Warranty | 5 years |

Features & Applications

The Prelux Milano IP54 8W LED recessed downlight is perfectly suited to both domestic and commercial applications which require an extra level of protection rating. This versatile fitting is tiltable 23° enabling the light to be directed to meet your specific needs.

- COB LED light source
- ADC12 aluminium body
- Push terminals for easy installation
- Long lifetime of 50,000 hours
- IP54 protection rating
- 60° wide beam angle
- Tilts 23°
- Ø83-86mm cutout
- CCT: 3000K
- 5 years warranty

| Options Available | |
|-----------------------|-----------------------|
| Light Controls | Casambi *CM / Dali *D |
| 3 Hr Emergency | PXEMPACK |