


Roma Slim 18W Datasheet

CCT 1350-1440Lm LED Downlight

PXRSLIM18WCCT

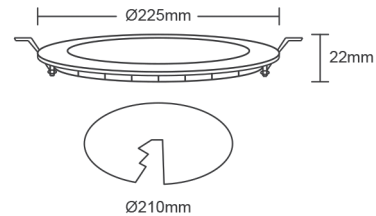

| | |
|---------------------------------|--------------------------|
| Dimensions | ø225*22mm, Cutout ø210mm |
| Weight | - |
| Material | Aluminium & PC |
| Colour/Finish | White |
| IK Rating | IK04 |
| Voltage/Frequency | AC220-240V, 50/60Hz |
| Luminous Flux | 1350/1440/1400lm |
| Luminous Efficacy | 80Lm/W |
| Color Rendering Index | 80 |
| CCT Colour Temp | 3000K/4000K/6000K |
| SDCM Colour Consistency | <6 |
| UGR Unified Glare Rating | - |
| LEDs | SMD |
| Light Control | On/Off |
| Beam Angle | 120° |
| Adjustable | No |
| Chip | Boke |
| Maintained Luminous Flux | L80 (B10) 50,000h |
| Warranty | 5 Years |

Features & Applications

Roma Slim is an LED downlight with super slender design, adopting high lumen SMD LEDs and a PC diffuser for a uniform light.

The Aluminum profile provides excellent thermal dissipation to extend the life of the LEDs.

- Super slim design, only 22mm in depth
- Colour temperature selectable
- 50,000 hour lifetime.
- 120° beam angle.

| Options Available | |
|-----------------------|------------|
| Casambi Module | On Request |
| DALI Dimmable | On Request |
| Emergency Kit | PXEMPACK |