


## Roma Slim 24W Datasheet

CCT 1800-1920Lm LED Downlight

PXRSLIM24WCCT

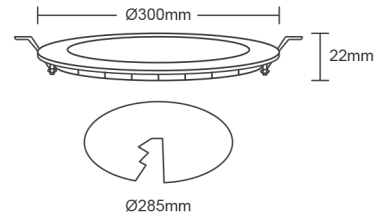

<b>Dimensions</b>	ø300*22mm, Cutout ø285mm
<b>Weight</b>	-
<b>Material</b>	Aluminium & PC
<b>Colour/Finish</b>	White
<b>IK Rating</b>	IK04
<b>Voltage/Frequency</b>	AC220-240V, 50/60Hz
<b>Luminous Flux</b>	1800/1920/1875lm
<b>Luminous Efficacy</b>	80Lm/W
<b>Color Rendering Index</b>	80
<b>CCT Colour Temp</b>	3000K/4000K/6000K
<b>SDCM Colour Consistency</b>	<6
<b>UGR Unified Glare Rating</b>	-
<b>LEDs</b>	SMD
<b>Light Control</b>	On/Off
<b>Beam Angle</b>	120°
<b>Adjustable</b>	No
<b>Chip</b>	Boke
<b>Maintained Luminous Flux</b>	L80 (B10) 50,000h
<b>Warranty</b>	5 Years

### Features & Applications

Roma Slim is an LED downlight with super slender design, adopting high lumen SMD LEDs and a PC diffuser for a uniform light.

The Aluminum profile provides excellent thermal dissipation to extend the life of the LEDs.

- Super slim design, only 22mm in depth
- Colour temperature selectable
- 50,000 hour lifetime.
- 120° beam angle.

Options Available	
<b>Casambi Module</b>	On Request
<b>DALI Dimmable</b>	On Request
<b>Emergency Kit</b>	PXEMPACK