

Valo 60W 2000K Datasheet

7,800lm LED Street Light

PXVALO60W



Complete with NEMA Socket




60W

IP66

LED


240V

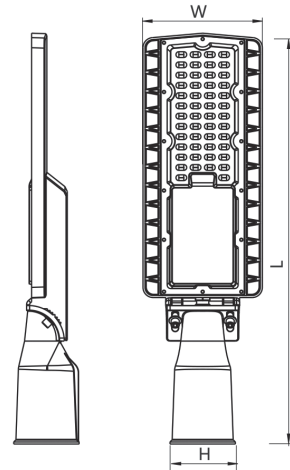

Tiltable 30°



Horizontal or Perpendicular Installation

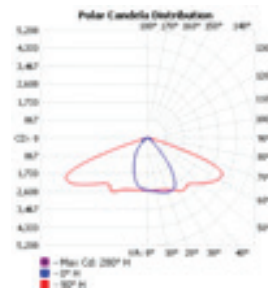

Enlarging 76mm Spigot Available (to be ordered separately)
Product Code: PXSP76

Dimensions	494*155*76mm
Wattage	60W
Weight	1.72kg
Material	Aluminum+PC
Colour/Finish	RAL9023
IK Rating	IK08
Voltage/Frequency	AC100-240V/50-60Hz
Luminous Flux	7,800Lm
Luminous Efficacy	125Lm/W
Color Rendering Index	70
Colour Temperature	2000K (Sodium Effect)
SDCM Colour Consistency	≤6
UGR Unified Glare Rating	-
LEDs	90pc
Light Control	On/off
Beam Angle	Type II, Medium
Adjustable	-15 to +15 degrees
Chip	SMD 3030
IP Rating	IP66
Maintained Luminous Flux	(L80B10) 50,000h
Warranty	5 years

Features & Applications

- Tiltable 30°
- 2000K colour temperature (Sodium Effect)
- Highly Efficient 125 Lm/W
- Excellent photometric design
- Complete with NEMA socket
- IP66 protection rating
- 60mm pole diameter size
- 76mm spigot available (to be ordered separately)
- 50,000 hour lifetime
- Excellent heat dissipation to extend the life of the LEDs.
- 5 year warranty

Options Available	
Wall Bracket	PXVALOWBK
76mm Spigot	PXSP76
Photocell Kit Code	PXPCHEAD