

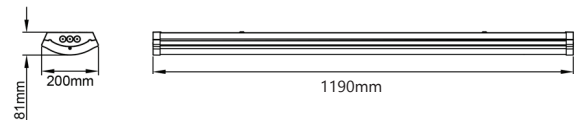


Campus II 38W 4ft Emergency Datasheet

4000K 4750Lm 125Lm/W LED Batten

PXCAMP38WEMV2

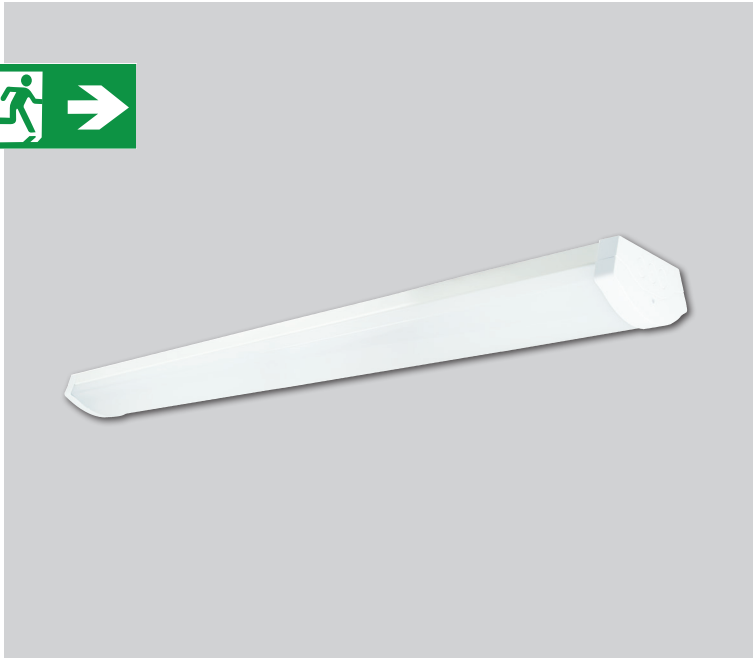

| | |
|---------------------------------|------------------------------|
| Dimensions | 1190*200*81mm (4ft) |
| Weight | - |
| Material | Steel body, PC diffuser |
| Colour/Finish | White |
| IK Rating | IK08 |
| Voltage/Frequency | 220-240V 50Hz |
| Luminous Flux | 4750lm |
| Luminous Efficacy | 125Lm/W |
| Color Rendering Index | 80 |
| CCT Colour Temp | 4000K |
| SDCM Colour Consistency | <4 |
| UGR Unified Glare Rating | <19 |
| LEDs | Everlight |
| Light Control | On/Off |
| Beam Angle | 80° |
| Adjustable | No |
| Chip | Epistar |
| Maintained Luminous Flux | L80 (B10) 50,000h |
| Emergency Mode | 3 hours @3W, LiFePO4 Battery |
| Battery Warranty | 4 Years |
| Fitting Warranty | 5 Years |

Features & Applications

The 38W 4ft UGR<19 Campus II surface luminaire is designed specifically for academic buildings. Also available in standard mode, this slim, contemporary style twin surface fitting provides an highly efficient 125Lm/W and an excellent quality of luminance for learning environments.

Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.