
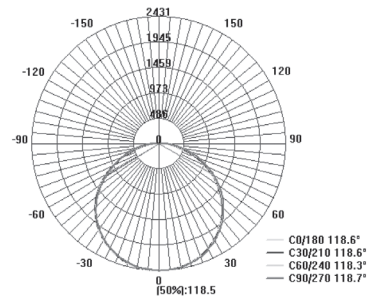


## Vapour 57W Standard Datasheet

6ft Twin 4000K 7980lm IP65 LED Batten

PXVAP657



<b>Dimensions</b>	1800*105*79mm
<b>Weight</b>	2kg
<b>Material</b>	Polycarbonate
<b>Colour/Finish</b>	Opal diffuser, grey base
<b>IK Rating</b>	IK08
<b>Voltage/Frequency</b>	220-240V 50Hz
<b>Luminous Flux</b>	7,980lm
<b>Luminous Efficacy</b>	140Lm/W
<b>Color Rendering Index</b>	>80
<b>CCT Colour Temp</b>	4000K
<b>SDCM Colour Consistency</b>	<4
<b>UGR Unified Glare Rating</b>	<22
<b>LEDs</b>	SMD2835
<b>Light Control</b>	On/Off
<b>Beam Angle</b>	120°
<b>Adjustable</b>	No
<b>Chip</b>	Epistar
<b>Maintained Luminous Flux</b>	L80 (B10) 50,000h
<b>Warranty</b>	5 Years

### Features & Applications

The Prelux Vapour 6ft 57W is a highly efficient anti-corrosive LED batten which produces an impressive 140Lm/W and provides a uniform light.

The IP65 protection rating makes the Vapour an ideal fitting for damp environments such as underground and multi-storey car parks.

Vapour is available in standard or emergency models in a range of sizes and comes with a 5 year warranty.

Options Available	
<b>MW Sensor</b>	On Request