



## Event 2W Standalone Datasheet

Non-Maintained 6000-6500K 160lm Emergency Version

PXALONE

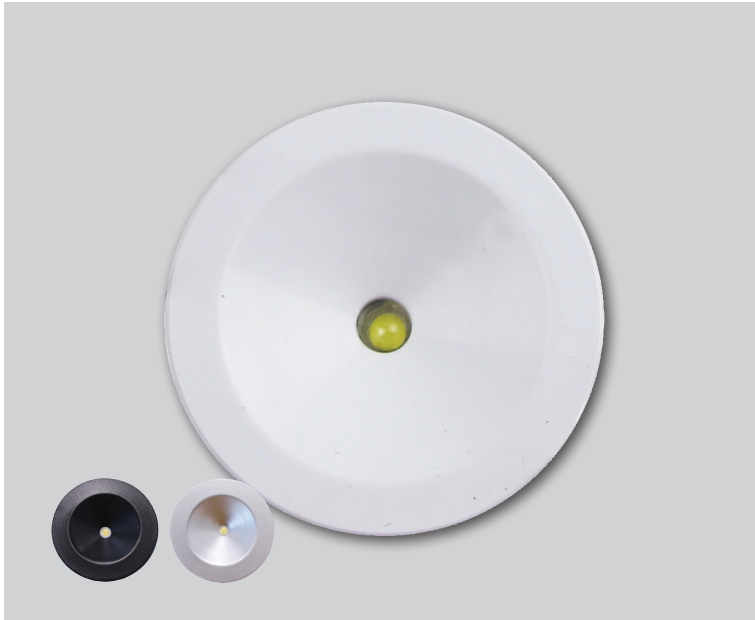

<b>Emergency Function</b>	3-4 Hours at 2W 160lm
<b>Emergency Type</b>	Non-Maintained
<b>Voltage/Frequency</b>	180-240V 50/60Hz
<b>Input Power</b>	2W
<b>Battery Type</b>	LiFePO4
<b>Material</b>	Aluminium & Polycarbonate
<b>Dimensions</b>	60*60*26mm Cutout 50mm
<b>Luminous Flux</b>	160lm
<b>Color Rendering Index</b>	>80
<b>CCT</b>	6000-6500K
<b>LEDs</b>	1pc 2W LED
<b>Protection Level</b>	IP20
<b>Housing Colour</b>	White (Silver & Black Bezels included)
<b>Certification</b>	CE, UKCA
<b>Battery Warranty</b>	4 Years
<b>Fitting Warranty</b>	5 Years
<b>Product Code</b>	PXALONE

## Features & Applications

The Prelux Standalone fitting with integrated driver and lithium battery pack provides 3-4 hours of light at 2W 160 lumens in emergency mode.

Silver and black bezels are included.

The fitting has an IP20 protection rating and is suitable for indoor applications.