
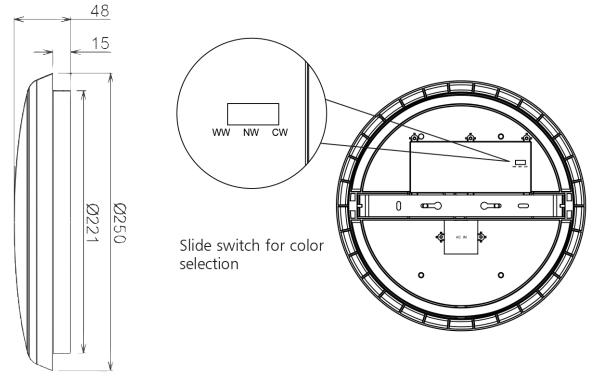



## Othello CCT Dimmable EM Datasheet

12W 1150-1300Lm LED Bulkhead / Ceiling Light

PXOTH12CCTDE



Slide switch for color selection

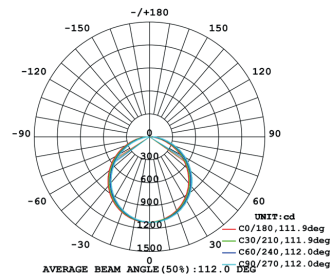

CE	UK CA	12W	IP54	LED	240V
----	-------	-----	------	-----	------

<b>Dimensions</b>	Ø250*48mm
<b>Weight</b>	0.76Kg
<b>Material</b>	PC Base
<b>Colour/Finish</b>	White
<b>IK Rating</b>	IK10
<b>Voltage/Frequency</b>	200-240V 50Hz
<b>Luminous Flux</b>	1150Lm (WW), 1300lm (CW), 1250Lm (DL)
<b>Luminous Efficacy</b>	100Lm/W
<b>Color Rendering Index</b>	>80
<b>CCT Colour Temp</b>	3000K / 4000K / 5700K
<b>SDCM Colour Consistency</b>	<6
<b>UGR Unified Glare Rating</b>	-
<b>LEDs</b>	2835 SMD
<b>Light Control</b>	Triac Dimming (8-100%)
<b>Beam Angle</b>	120°
<b>Adjustable</b>	No
<b>Chip</b>	SMD
<b>Maintained Luminous Flux</b>	L80 (B10) 40,000h
<b>Emergency Mode</b>	3-4h@4W, LiFePO4 Battery
<b>Warranty</b>	3 Years Fitting & Battery

### Features & Applications

The Othello CCT comes with the ability to choose either warm, cool or daylight colour temperatures by sliding a switch on installation of the product.

The IP54 protection rating also makes it suitable for a wider range of applications, including stairwells, corridors and toilet facilities.

The slim design and superior quality finish also makes the Othello CCT range a superb choice when aesthetics are a consideration.

#### Options Available

<b>Casambi Module</b>	Available on Request
-----------------------	----------------------