


## Cobra 30W Wall Pack Datasheet

Slim 4000K 2500lm Bulkhead (Black)

PXWALL

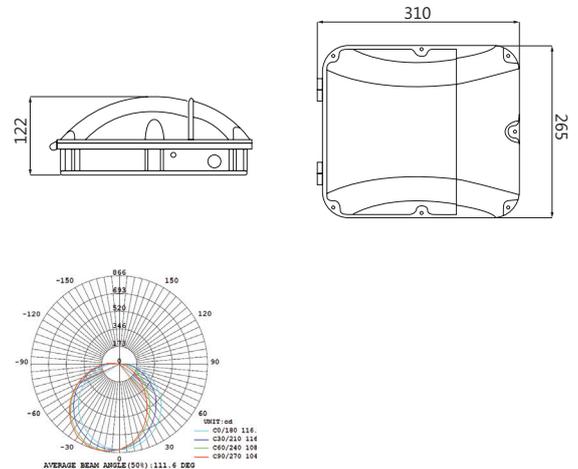

<b>Dimensions</b>	310*265*122 mm
<b>Weight(net weight)</b>	1.80 kg
<b>Material</b>	Die-cast Aluminium & PC
<b>Wattage</b>	30W
<b>Colour/Finish</b>	Black
<b>IK Rating</b>	IK08
<b>Voltage/Frequency</b>	AC220-240V 50/60 Hz
<b>Luminous Flux</b>	2,500 lm
<b>Luminous Efficacy</b>	83 lm/W
<b>Color Rendering Index</b>	≥80
<b>CCT Colour Temp</b>	4000K
<b>SDCM Colour Consistency</b>	<6
<b>UGR Unified Glare Rating</b>	N/A
<b>LEDs</b>	SMD 2835 (80 PCS)
<b>Light Control</b>	N/A
<b>Beam Angle</b>	120°
<b>Adjustable</b>	No
<b>Chip</b>	Epistar
<b>IP Rating</b>	IP65
<b>L80B10</b>	50,000 h
<b>Warranty</b>	5 Years

### Features & Applications

The Prelux Cobra 30W 2500lm LED Slim Wall Pack is a flexible and robust fitting which can be used in a wide range of outdoor applications. The IP65 protection rating along with the tough die-cast aluminium and PC body will ensure this fitting will shine for years to come.

Prelux Cobra LED Slim Wall Pack fittings are also available in photocell versions.