
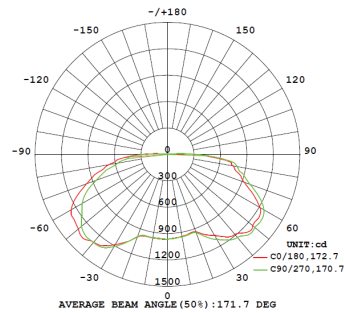


Halo Post Top 60W Datasheet

60W 7,500Lm LED Highbay

PXHALO

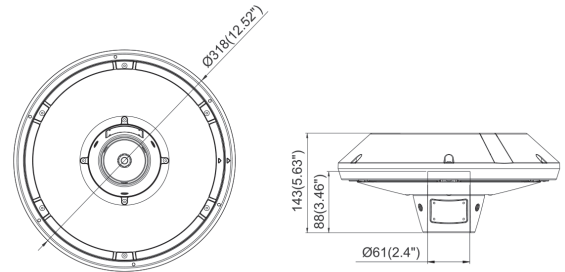

Dimensions	Ø318*143mm
Cut-Out	-
Weight	3.3kg
Material	Aluminum
Wattage	60w
Colour/Finish	Silver
IK Rating	IK08
Voltage/Frequency	AC100-240V, 50/60Hz
Luminous Flux	7,500Lm
Luminous Efficacy	125lm/w
Color Rendering Index	CRI≥70
CCT Colour Temp	4000K
SDCM Colour Consistency	≤5
UGR Unified Glare Rating	N/A
LEDs	SMD2835
Light Control	On/Off
Beam Angle	R00C49
Adjustable	Non-adjustable
Chip	MOSO
IP Rating	IP66
L80B10	>50,000h
Warranty	5 years

Features & Applications

The Halo is designed for urban areas and public spaces, car parks, streets and parklands.

The downward aspect of the light source provides a soft, low glare luminance which helps to reduce light pollution in the night sky.

Halo is also highly efficient, producing an impressive 7,500Lm at 125Lm/W.