




Eco 36W 1200x300 (UGR<19)

4000K 4320Lm Recessed Backlit LED Panel

PXECO123

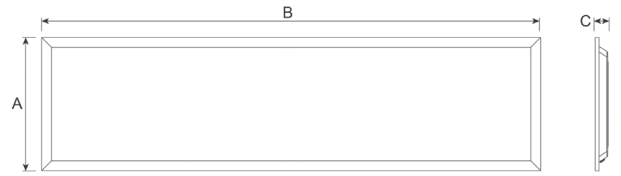

Dimensions (mm)	A	B	C
	295	1195	26

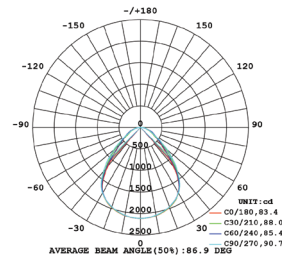

Dimensions (mm)	1195*295*26
Weight (kg)	1.4Kg
Material	Aluminium, PMMA Lens, PS Diffuser
Colour/Finish	White
IK Rating	IK02
Voltage/Frequency	200-240V 50/60Hz
Luminous Flux	4320Lm
Luminous Efficacy	120Lm/W
Color Rendering Index	≥80
CCT Colour Temp	4000K
SDCM Colour Consistency	<5
UGR Unified Glare Rating	UGR<19
LEDs	SMD 2835 48pcs
Light Control	On/Off
Beam Angle	90°
Adjustable	No
Chip	Jufei
IP Rating	IP20
Maintained Luminous Flux	50,000h (L80B10), 65,000h (L70B50)
Warranty	5 years

Features & Applications

- Backlit LED Panel.
- Lumen Output: 4320Lm.
- Installation: Recessed/Suspended/Surface.
- Luminous Efficacy: 120Lm/W.
- External Driver.
- UGR<19 Anti Glare.

Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.

Options Available	
Light Controls	Dali *D
Driver (DALI)	PXDADRY42W
Driver (Triac Dimmable)	PXTRDRY40WK
Recessed Clip	PXECOCLIP
Suspension Kit	PXECOWIREK