
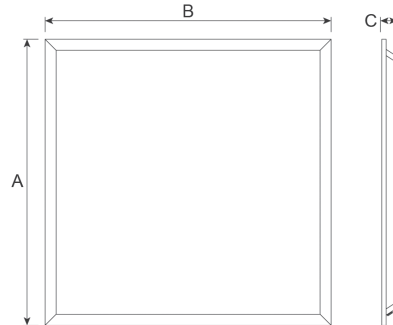



## Eco 30W CCT 600x600 (UGR<19)

3000K/4000K/6000K Selectable 3600Lm Recessed LED Panel

PXECO66CCT

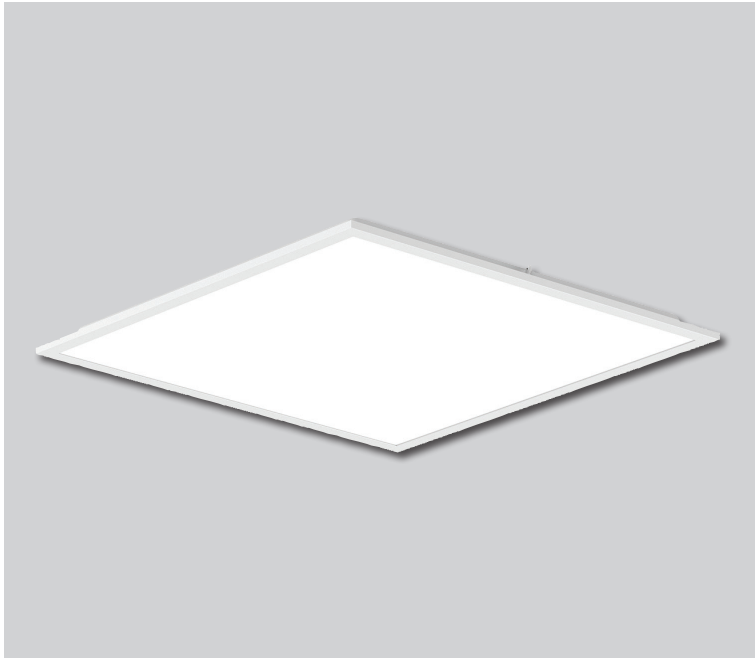

Dimensions (mm)	A	B	C
	595	595	30



<b>Dimensions (mm)</b>	595*595*30
<b>Weight (kg)</b>	1.75Kg
<b>Material</b>	Aluminium, PMMA Lens, PS Diffuser
<b>Colour/Finish</b>	White
<b>IK Rating</b>	IK04
<b>Voltage/Frequency</b>	200-240V 50/60Hz
<b>Luminous Flux</b>	3600Lm
<b>Luminous Efficacy</b>	120Lm/W
<b>Color Rendering Index</b>	≥80
<b>CCT Colour Temp</b>	3000K/4000K/6000K
<b>SDCM Colour Consistency</b>	≤6
<b>UGR Unified Glare Rating</b>	UGR<19
<b>LEDs</b>	SMD 2835 64pcs
<b>Light Control</b>	On/Off
<b>Beam Angle</b>	90°
<b>Adjustable</b>	No
<b>Chip</b>	Sanan
<b>IP Rating</b>	IP20
<b>Maintained Luminous Flux</b>	50,000h (L80B10), 65,000h (L70B50)
<b>Warranty</b>	5 years

## Features & Applications

- Colour Temperature Selectable.
- Optic Lens for Uniform Light Effect.
- Lumen Output: 3600Lm.
- Installation: Recessed/Suspended/Surface.
- Luminous Efficacy: 120Lm/W.
- External Driver.
- UGR<19 Anti Glare.

### Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.

Options Available	
<b>Light Controls</b>	Dali *D
<b>Driver (DALI)</b>	PXDADRY42W
<b>Recessed Clip</b>	PXECOCLIP
<b>Suspension Kit</b>	PXECOWIRE