
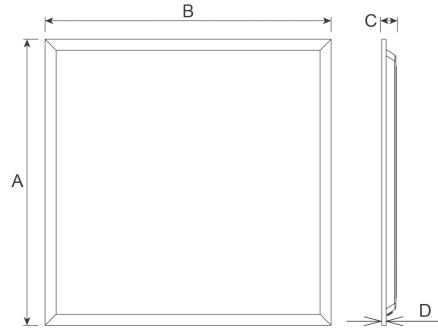



Eco 36W 600x600 (UGR<19) Datasheet

6000K 3750Lm Recessed LED Panel

PXECO66V6K

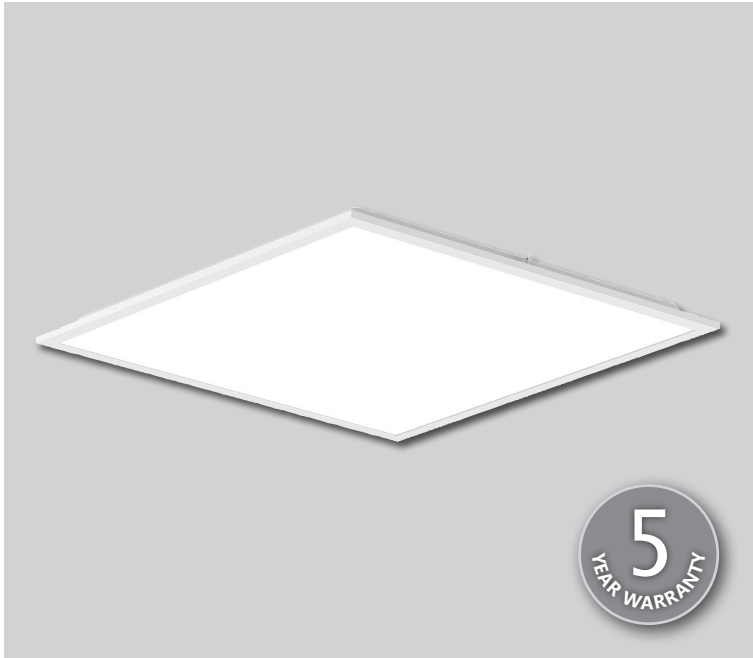

Dimensions (mm)	A	B	C	D
	595	595	25	9



CE	UK CA	36W	IP40	LED	240V
-----------	--------------	------------	-------------	------------	-------------

Dimensions (mm)	595*595*25
Weight (kg)	1.82
Material	Aluminium & PC
Colour/Finish	White
IK Rating	IK02
Voltage/Frequency	220-240V 50/60Hz
Luminous Flux	3750lm
Luminous Efficacy	104lm/w
Color Rendering Index	>80
CCT Colour Temp	6000K
SDCM Colour Consistency	<5
UGR Unified Glare Rating	UGR<19
LEDs	2835 SMD
Light Control	On/Off
Beam Angle	90°
Adjustable	No
Chip	Hongli
IP Rating	IP40
Maintained Luminous Flux	50,000h
Warranty	5 years

Features & Applications

- 6000K Daylight Colour Temperature.
- Optic Lens for Uniform Light Effect.
- Lumen output: 3750Lm.
- Installation: Recessed/Suspended/Surface.
- Luminous efficacy: 104lm/w.
- External Driver.
- IP40 Protection Rating.
- UGR<19 Anti Glare.

Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.

Options Available	
Light Controls	Dali *D
Driver (Standard)	PXECODRIVE
Driver (DALI)	PXDADRY42W
Recessed Clip	PXECOCLIP
Suspension Kit	PXECOWIRE