
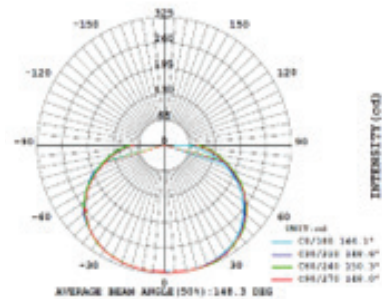
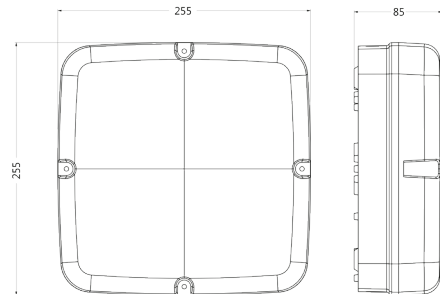


## Maxi Square Black Emergency Datasheet

CCT Power Selectable 1800-1975lm Bulkhead

PXBULKSQBLEM

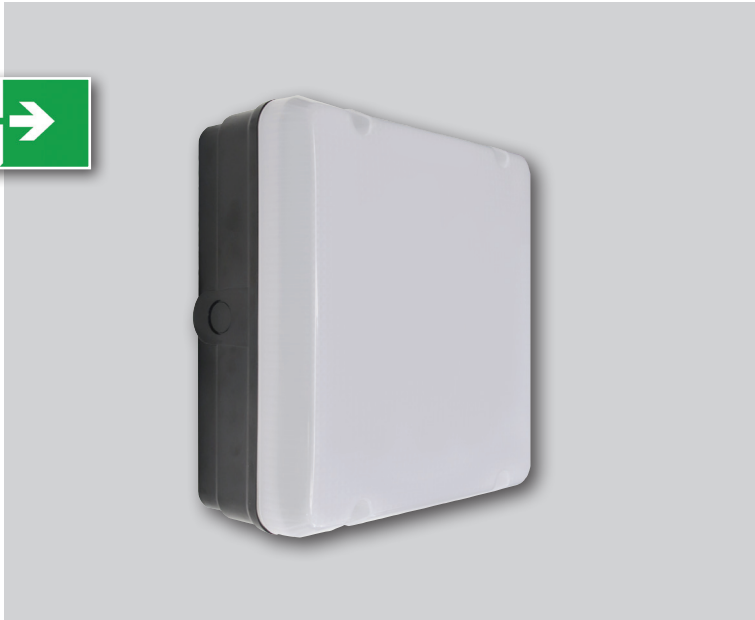

<b>Dimensions</b>	255*255*85mm
<b>Weight</b>	0.8Kg
<b>Material</b>	PC
<b>Colour/Finish</b>	Black
<b>IK Rating</b>	IK10
<b>Voltage/Frequency</b>	200-240V 50/60Hz
<b>Luminous Flux</b>	1800/1975/1880Lm
<b>Luminous Efficacy</b>	100-110lm/W
<b>Color Rendering Index</b>	≥80
<b>CCT Colour Temp</b>	CCT 3000K/4000K/6000K Selectable
<b>SDCM Colour Consistency</b>	≤6
<b>UGR Unified Glare Rating</b>	-
<b>LEDs</b>	SMD 2835
<b>Light Control</b>	On/Off
<b>Beam Angle</b>	140°
<b>Adjustable</b>	No
<b>Chip</b>	Epistar
<b>Maintained Luminous Flux</b>	L80 (B10) 50,000h
<b>Emergency Mode</b>	3h@2W 210Lm, LiFePO4 Battery
<b>Warranty</b>	5 Years Fitting / 4 Years Battery

### Features & Applications

The Prelux Maxi is an extremely flexible fitting with three possible wattages as well as three selectable colour temperatures.

The tough IK10 / IP65 PC body makes it an ideal fitting for outdoor applications.

- Wattage Selectable
- Colour Temperature Selectable
- IP65/IK10 Protection Rating
- 140° Beam Angle
- 5 Year Warranty