


Campus V4 5ft Emergency Datasheet

CCT 3000K/4000K/6000K 7250Lm - Up to 125Lm/W LED Batten

PXCAMPCTV4EM

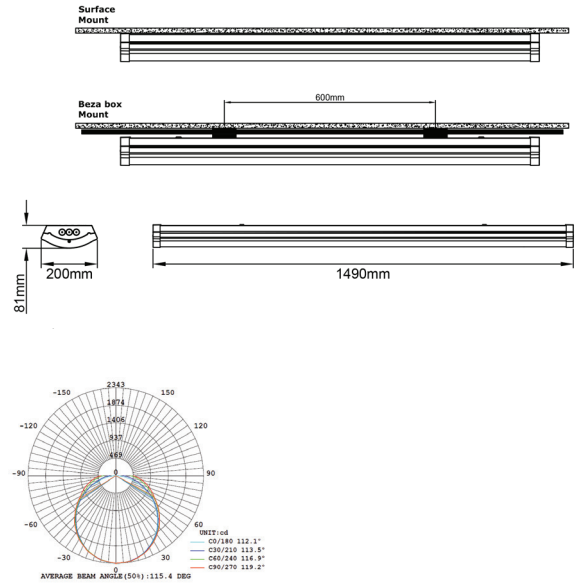

Dimensions	1490*200*81mm
Weight	2.65kg
Material	Steel body, PC diffuser
Colour/Finish	White (RAL 9016)
IK Rating	IK04
Voltage/Frequency	220-240V 50/60Hz
Luminous Flux	(32W) 3840Lm/4000Lm/3936Lm (41W) 4920Lm/5125Lm/5043Lm (50W) 6000Lm/6250Lm/6150Lm (58W) 6960Lm/7250Lm/7134Lm
Luminous Efficacy	120-125Lm/W
Color Rendering Index	≥80
CCT Colour Temp	3000K/4000K/6000K Selectable
SDCM Colour Consistency	≤5
UGR Unified Glare Rating	<19
LEDs	SMD 2835 384pcs
Light Control	On/Off
Beam Angle	120°
Adjustable	No
Chip	Epistar
Maintained Luminous Flux	50,000h (L80B10), 65,000h (L70B50)
Emergency Mode	3 hours @3W, LiFePO4 Battery
Warranty	5 Years Fitting, 5 Years Battery

Features & Applications

The 4th generation multi-watt power selectable 5ft UGR<19 Campus surface luminaire is designed for academic buildings. Also available in standard model, this slim, contemporary style twin surface fitting provides up to 125Lm/W and an excellent quality of luminance for learning environments.

Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.